



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell: (985) 688-8562
email: lpride@lumcon.edu
www.lumcon.edu/diveprogram



Louisiana Universities Marine Consortium

Scientific Diving Manual

July 2004

Revised January 2014



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell: (985) 688-8562
email: lpriide@lumcon.edu
www.lumcon.edu/diveprogram



FOREWORD

This manual sets forth the minimal safety standards for state-of-the-art scientific diving conducted under the auspices of the Louisiana Universities Marine Consortium (LUMCON). The standards are based upon the American Academy of Underwater Sciences (AAUS) Standards for Scientific Diving, December 2011 revision. AAUS is the nationally recognized authority for scientific diving in the United States of America.

The Diving Control Board of the Louisiana Universities Marine Consortium (LUMCON) recognizes and fully acknowledges the hard work of the AAUS and its member organizations in developing the standards and producing the manuals upon which this volume is based. Like many AAUS member organizations, we retained the format of the AAUS manual (e.g., sections, numbering, etc.) while adding or changing material to suit our local conditions.

As required by AAUS mandate, Sections 1-6 of this manual set the minimum requirements for scientific diver education and operation of the scientific diving program at LUMCON. These sections are taken nearly verbatim from the AAUS standards as revised in November 2006, with additions concerning required equipment and more specifics on depth certification. We have chosen to retain Sections 7-13 of the AAUS standards in the event the advanced techniques covered in those sections are needed. Sections 14-19 cover issues specific to diving at LUMCON.

Appendices 1-7 include forms required by AAUS, while appendices A-P include forms specific to the LUMCON Scientific Diving Program.

Revision History for AAUS Standards

April, 1987	
October, 1990	
May, 1994	
January, 1996	
March 1999	Added Sec 7.6.1 Nitrox Diving Guidelines. Revised Appendix 7 and 11.
January 2001	Revised Section 1.23.1 DSO Qualifications. Revised Section 5.31.4 Emergency Care Training. Revised Section 6 Medical Standards. Made Sec 7.6.1 Nitrox Diving Guidelines into Section 7. Added Section 8.0 Scientific Aquarium Diving. Moved Section 7.0 to Section 9.0 Other Diving Technologies. Removed Appendix 7 AAUS Checkout Dive and Training Evaluation. Revised Section 5.33.3. Revised Section 4.23.2.
April 2002	
August 2003	Section 1.27.3 Delete reference to Appendix 9 (checkout dive). Section 1.4 Remove word "waiver". Section 2.21 Change "supervisor" to "lead diver". Section 2.72.2.1 Remove reference to Appendix 13, and remove Appendix 13. Replace with "at www.aaus.org" after Incident Report. Section 3.28.3 Remove Appendix 10 (dive computers). Section 5.32 Training and 100-hour requirement, eliminate "beyond the DIT level". Section 5.32.1 Eliminate paragraph "Suggested topics include" and replace it with a list of topics for inclusion in the 100 hours. Some of these topics would be designated "R" (required). Section 4.0 Remove lead sentence "This section describes for diving". Alter the lead sentence read as follows: "This section describes training for the non-diver applicant, previously not certified for diving, and equivalency for the certified diver." Section 4.3 Delete this section. Section 9 Update Required Decompression (9.10) and Mixed Gas Diving (9.60) to individual sections. Appendices 9, 10, 11, and 12 Remove these and make available online as historic documents in the Virtual Office. Formatted document for consistency. Separated manual into two volumes. Volume 1 and the appendices are required for all manual and Volume 2 sections only apply when the referenced diving activity is being conducted. Volume 2 is where organizational specific information is contained.
October 2005	Section 11.70 Deleted section for rebreathers.
March 2006	Section 12.00 Added new section for rebreathers. Section 13.00 Added new section for cave and cavern diving.
April 2006	Section 11.5 and 11.6, revised definitions for Hookah and surfaced supplied diving. Section 5.30 Deleted emergency care training prerequisite. Section 5.50 Added emergency care training requirements to Continuation of Certificate.
November 2006	Section 2.60 flying after diving rules updated to meet current DAN standards. Section 3.20 dive computers reference changed to "appendix 8". Section 3.60 air quality guidelines updated to meet current CGA standards. Section 5.30 – added words "Transect Sampling" to item #9. Appendix 1 – Updated one medical web link. Appendix 2 - Added the abbreviation "DO" to the MD signature line. Appendix 6 – new LOR template. Updated and added Appendix 8 dive computer recommendations Added Appendix 9 (criteria for entering diving statistics).
December 2009	Appendix 2 – Revised

December 2011

Section 6 – updated after Medical Review Panel suggestions Appendix 1-

CONTENTS

Volume 1.....	8
1.10 Scientific Diving Standards	9
1.20 Operational Control	11
1.30 Consequence of Violation of Regulations by Scientific Divers	14
1.40 Consequences of Violation of Regulations by the LUMCON Diving Program...	14
1.50 Record Maintenance	14
Section 2.00 DIVING REGULATIONS FOR SCUBA (OPEN CIRCUIT, COMPRESSED AIR).....	16
2.10 Introduction.....	16
2.20 Pre-Dive Procedures	16
2.30 Diving Procedures.....	17
2.40 Post-Dive Procedures.....	17
2.50 Emergency Procedures.....	17
2.70 Record Keeping Requirements	18
Section 3.00 DIVING EQUIPMENT	20
3.10 General Policy.....	20
3.20 Equipment.....	20
3.30 Auxiliary Equipment.....	21
3.40 Support Equipment	21
3.60 Air Quality Standards	22
Section 4.00 ENTRY-LEVEL TRAINING REQUIREMENTS	24
4.10 Evaluation	24
4.20 SCUBA Training	24
Section 5.00 SCIENTIFIC DIVER CERTIFICATION.....	26
5.10 Certification Types.....	26
5.20 General Policy.....	26
5.30 Requirements for Scientific Diver Certification.....	26
5.40 Depth Certifications	30
Diving on air is not permitted beyond a depth of 190 feet.	30
5.50 Continuation of Certificate	30
5.60 Revocation of Certification.....	31
5.70 Recertification.....	31

Section 6.00	MEDICAL STANDARDS	32
6.10	Medical Requirements	32
Volume 2	35
Section 7.00	NITROX DIVING GUIDELINES	36
7.10	Prerequisites	36
7.20	Requirements for Authorization to Use Nitrox.....	36
7.30	Nitrox Training Guidelines.....	37
7.40	Scientific Nitrox Diving Regulations.....	38
7.50	Nitrox Diving Equipment	41
8.10	General Policy.....	43
8.20	The Buddy System in Scientific Aquarium Diving	43
8.30	Diving Equipment.....	43
8.40	Scientific Aquarium Diver Certification.....	43
Section 9.00	STAGED DECOMPRESSION DIVING	45
9.10	Minimum Experience and Training Requirements.....	45
9.20	Minimum Equipment Requirements:.....	46
Section 10.00	MIXED GAS DIVING	48
10.10	Minimum Experience and Training Requirements.....	48
10.20	Equipment and Gas Quality Requirements.....	48
10.30	Minimum Operational Requirements	49
Section 11.00	OTHER DIVING TECHNOLOGY	50
11.10	Blue Water Diving	50
11.20	Ice and Polar Diving	50
11.30	Overhead Environments.....	50
11.40	Saturation Diving.....	50
11.50	Hookah.....	50
11.60	Surface Supplied Diving.....	50
11.70	Closed and Semi-Closed Circuit SCUBA (Rebreathers).....	51
Section 13.00	SCIENTIFIC CAVE AND CAVERN DIVING STANDARD	63
Section 14.00	USE OF SCUBA IN LUMCON DIVING ACTIVITIES.....	71
14.10	Faculty, students, and staff at member universities	71
14.20	Volunteer divers, non-employee.....	71
Section 15.00	DIVER RESPONSIBILITIES	74

Section 16.00 DIVING FROM LUMCON VESSELS.....	76
16.1 Standard regulations for all vessels.....	76
16.2 Regulations for diving from the <i>R/V Pelican</i>	76
Section 17.00 DIVING IN THE VICINITY OF PETROLEUM PLATFORMS.....	79
17.1 Permission to dive or anchor near oil platforms.....	79
17.2 Increased boat traffic near oil/gas platforms.....	79
17.3 Overhead obstructions.....	79
17.4 Entanglement danger.....	79
Section 19.00 RECOMMENDATIONS OF THE LUMCON DIVING CONTROL BOARD.....	81
Appendices.....	82
AAUS MEDICAL EVALUATION OF FITNESS FOR SCUBA DIVING REPORT.....	88
APPENDIX 3 DIVING MEDICAL HISTORY FORM.....	89
APPENDIX 4 RECOMMENDED PHYSICIANS WITH EXPERTISE IN DIVING MEDICINE.....	91
APPENDIX 5 DEFINITION OF TERMS.....	92
APPENDIX 5 DEFINITION OF TERMS (page 2).....	93
APPENDIX 5 DEFINITION OF TERMS (page 3).....	94
APPENDIX 5 DEFINITION OF TERMS (page 4).....	95
APPENDIX 5 DEFINITION OF TERMS (page 5).....	96
APPENDIX 7 DIVING EMERGENCY MANAGEMENT PROCEDURES.....	98
APPENDIX 8 DIVE COMPUTER GUIDELINES.....	99
APPENDIX 9 AAUS STATISTICS COLLECTION CRITERIA AND DEFINITIONS.....	100
APPENDIX C LUMCON SCIENTIFIC DIVER WAIVER OF LIABILITY.....	95
APPENDIX D LUMCON NON-EMPLOYEE WAIVER OF LIABILITY.....	96
APPENDIX E INDEMNIFICATION AND STATEMENT OF RESPONSIBILITY OF MEMBER UNIVERSITY.....	97
APPENDIX G MEDICAL INFORMATION RELEASE.....	99
APPENDIX H LUMCON ACKNOWLEDGEMENT OF RESPONSIBILITIES AND CERTIFICATION OF DIVING ACCIDENT INSURANCE.....	100
APPENDIX J LUMCON DIVE PLAN FORM.....	102
APPENDIX L LUMCON DIVING EMERGENCY PLAN FORM.....	104
APPENDIX M LUMCON INCIDENT REPORT FORM.....	105
APPENDIX N LUMCON CALL IN DATA FORM.....	107

Volume 1

Sections 1.00 through 6.00

Required for All Organizational Members

Section 1.00 GENERAL POLICY

1.10 Scientific Diving Standards

Purpose

The purpose of these Scientific Diving Standards is to ensure that all scientific diving is conducted in a manner that will maximize protection of scientific divers from accidental injury and/or illness, and to set forth standards for training and certification that will allow a working reciprocity between organizational members. Fulfillment of the purposes shall be consistent with the furtherance of research and safety.

This standard sets minimal standards for the establishment of the American Academy of Underwater Sciences (AAUS) recognized scientific diving programs, the organization for the conduct of these programs, and the basic regulations and procedures for safety in scientific diving operations. It also establishes a framework for reciprocity between AAUS organizational members that adhere to these minimum standards.

This standard was developed and written by AAUS by compiling the policies set forth in the diving manuals of several university, private, and governmental scientific diving programs. These programs share a common heritage with the scientific diving program at the Scripps Institution of Oceanography (SIO). Adherence to the SIO standards has proven both feasible and effective in protecting the health and safety of scientific divers since 1954.

In 1982, OSHA exempted scientific diving from commercial diving regulations (29CFR1910, Subpart T) under certain conditions that are outlined below. The final guidelines for the exemption became effective in 1985 (Federal Register, Vol. 50, No.6, p.1046). AAUS is recognized by OSHA as the scientific diving standard setting organization.

Additional standards that extend this document may be adopted by the LUMCON Diving Control Board, according to local procedure.

Scientific Diving Definition

Scientific diving is defined (29CFR1910.402) as diving performed solely as a necessary part of a scientific, research, or educational activity by employees whose sole purpose for diving is to perform scientific research tasks.

Scientific Diving Exemption

OSHA has granted an exemption for scientific diving from commercial diving regulations under the following guidelines (Appendix B to 29CFR1910 Subpart T):

- a) The Diving Control Board consists of a majority of active scientific divers and has autonomous and absolute authority over the scientific diving program's operation.
- b) The purpose of the project using scientific diving is the advancement of science; therefore, information and data resulting from the project are non-proprietary.
- c) The tasks of a scientific diver are those of an observer and data gatherer.

Construction and trouble-shooting tasks traditionally associated with commercial diving are not included within scientific diving.

- d) Scientific divers, based on the nature of their activities, must use scientific expertise in studying the underwater environment and therefore, are scientists or scientists-in-training.

- e) In addition, the scientific diving program shall contain at least the following elements (29CFR1910.401):
1. Diving safety manual which includes at a minimum: Procedures covering all diving operations specific to the program; including procedures for emergency care, recompression and evacuation, and the criteria for diver training and certification.
 2. Diving control (safety) board, with the majority of its members being active scientific divers, which shall at a minimum have the authority to: approve and monitor diving projects, review and revise the diving safety manual, assure compliance with the manual, certify the depths to which a diver has been trained, take disciplinary action for unsafe practices, and assure adherence to the buddy system (a diver is accompanied by and is in continuous contact with another diver in the water) for SCUBA diving.

Review of Standards

As part of LUMCON's annual report, any recommendations for modifications of the AAUS standards shall be submitted to the AAUS for consideration.

1.20 Operational Control

LUMCON Auspices Defined

For the purposes of these standards the auspices of the Louisiana Universities Marine Consortium includes any scientific diving operation in which LUMCON is connected because of ownership of any equipment used, locations selected, or relationship with the individual(s) concerned. This includes all cases involving the operations of employees of LUMCON or employees of auxiliary organizations, where such employees are acting within the scope of their employment, and the operations of other persons who are engaged in scientific diving of LUMCON or are diving as members of an organization recognized by the AAUS organizational member.

It is LUMCON's responsibility to adhere to the AAUS Standards for Scientific Diving Certification and Operation of Scientific Diving Programs. The administration of the local diving program will reside with the LUMCON's Diving Control Board (DCB).

The regulations herein shall be observed at all locations where scientific diving is conducted.

LUMCON's Scientific Diving Standards and Safety Manual

LUMCON shall develop and maintain a scientific diving safety manual that provides for the development and implementation of policies and procedures that will enable LUMCON to meet requirements of local environments and conditions as well as to comply with the AAUS scientific diving standards. LUMCON's scientific diving manual shall include, but not be limited to:

- a) AAUS standards may be used as a set of minimal guidelines for the development of LUMCON's scientific diving safety manual. Volume 1, Sections 1.00 through 6.00 and the Appendices are required for all manuals. Volume 2, Sections 7.00 through

9.00 are required only when LUMCON conducts that diving activity. LUMCON specific sections are placed in Volume 3.

- b) Emergency evacuation and medical treatment procedures.
- c) Criteria for diver training and certification.
- d) Standards written or adopted by reference for each diving mode utilized which include the following:
 - 1. Safety procedures for the diving operation.
 - 2. Responsibilities of the dive team members.
 - 3. Equipment use and maintenance procedures.
 - 4. Emergency procedures.

Diving Safety Officer

The Diving Safety Officer (DSO) serves as a member of the Diving Control Board (DCB). This person should have broad technical and scientific expertise in research related diving.

- a) Qualifications
 - 1. Shall be appointed by the responsible administrative officer or designee, with the advice and counsel of the Diving Control Board.
 - 2. Shall be trained as a scientific diver.
 - 3. Shall be a full member as defined by AAUS.
 - 4. Shall be an active underwater instructor from an internationally recognized certifying agency.
- b) Duties and Responsibilities
 - 1. Shall be responsible, through the DCB, to the responsible administrative officer or designee, for the conduct of the scientific diving program of the membership organization. The routine operational authority for this program, including the conduct of training and certification, approval of dive plans, maintenance of diving records, and ensuring compliance with this standard and all relevant regulations of the membership organization, rests with the Diving Safety Officer.
 - 2. May permit portions of this program to be carried out by a qualified delegate, although the Diving Safety Officer may not delegate responsibility for the safe conduct of the local diving program.
 - 3. Shall be guided in the performance of the required duties by the advice of the DCB, but operational responsibility for the conduct of the local diving program will be retained by the Diving Safety Officer.
 - 4. Shall suspend diving operations considered to be unsafe or unwise.

Diving Control Board

- a) The Diving Control Board (DCB) shall consist of a majority of active scientific divers. Voting members shall include the Diving Safety Officer, the responsible administrative officer, or designee, and should include other representatives of the diving program such as qualified divers and members selected by procedures established by LUMCON. A chairperson and a secretary may be chosen from the membership of the board according to local procedure.
- b) Has autonomous and absolute authority over the scientific diving program's

operation.

- c) Shall approve and monitor diving projects.
- d) Shall review and revise the diving safety manual.
- e) Shall assure compliance with the diving safety manual.
- f) Shall certify the depths to which a diver has been trained.
- g) Shall take disciplinary action for unsafe practices.
- h) Shall assure adherence to the buddy system for SCUBA diving.
- i) Shall act as the official representative of the membership organization in matters concerning the scientific diving program.
- j) Shall act as a board of appeal to consider diver-related problems.
- k) Shall recommend the issue, reissue, or the revocation of diving certifications.
- l) Shall recommend changes in policy and amendments to AAUS and LUMCON's diving safety manual as the need arises.
- m) Shall establish and/or approve training programs through which the applicants for certification can satisfy the requirements of the LUMCON's diving safety manual.
- n) Shall suspend diving programs that are considered to be unsafe or unwise.
- o) Shall establish criteria for equipment selection and use.
- p) Shall recommend new equipment or techniques.
- q) Shall establish and/or approve facilities for the inspection and maintenance of diving and associated equipment.
- r) Shall ensure that the LUMCON's air station(s) meet air quality standards as described in Section 3.60.
- s) Shall periodically review the Diving Safety Officer's performance and program.
- t) Shall sit as a board of investigation to inquire into the nature and cause of diving accidents or violations of the LUMCON's diving safety manual.
- u) Shall meet a minimum of two times per year, and as needed.

Instructional Personnel

- a) Qualifications - All personnel involved in diving instruction under the auspices of LUMCON shall be qualified for the type of instruction being given.
- b) Selection - Instructional personnel will be selected by the responsible administrative officer, or designee, who will solicit the advice of the DCB in conducting preliminary screening of applicants for instructional positions.

Lead Diver

For each dive, one individual shall be designated as the Lead Diver who shall be at the dive location during the diving operation. The Lead Diver shall be responsible for:

- a) Coordination with other known activities in the vicinity that are likely to interfere with diving operations.
- b) Ensuring all dive team members possess current certification and are qualified for the type of diving operation.
- c) Planning dives in accordance with Section 2.20
- d) Ensuring safety and emergency equipment is in working order and at the dive site.
- e) Briefing dive team members on:

1. Dive objectives.
2. Unusual hazards or environmental conditions likely to affect the safety of the diving operation.
3. Modifications to diving or emergency procedures necessitated by the specific diving operation.
4. Suspending diving operations if in their opinion conditions are not safe.
5. Reporting to the DSO and DCB any physical problems or adverse physiological effects including symptoms of pressure-related injuries.

Reciprocity and Visiting Scientific Diver

- a) Two or more AAUS Organizational Members engaged jointly in diving activities, or engaged jointly in the use of diving resources, shall designate one of the participating Diving Control Boards to govern the joint dive project.
- b) A Scientific Diver from one Organizational Member shall apply for permission to dive under the auspices of LUMCON by submitting to the Diving Safety Officer of LUMCON a document containing all the information described in Appendix 6, signed by the Diving Safety Officer or Chairperson of the home Diving Control Board.
- c) A visiting Scientific Diver may be asked to demonstrate their knowledge and skills for the planned dive.
- d) If a LUMCON denies a visiting Scientific Diver permission to dive, the LUMCON Diving Control Board shall notify the visiting Scientific Diver and their Diving Control Board with an explanation of all reasons for the denial.

Waiver of Requirements

The LUMCON Diving Control Board may grant a waiver for specific requirements of training, examinations, depth certification, and minimum activity to maintain certification.

1.30 Consequence of Violation of Regulations by Scientific Divers

Failure to comply with the regulations of LUMCON's diving safety manual may be cause for the revocation or restriction of the diver's scientific diving certificate by action of the LUMCON Diving Control Board.

1.40 Consequences of Violation of Regulations by the LUMCON Diving Program

Failure to comply with the regulations of this standard may be cause for the revocation or restriction of LUMCON's recognition by AAUS.

1.50 Record Maintenance

The Diving Safety Officer or designee shall maintain permanent records for each Scientific Diver certified. The file shall include evidence of certification level, log sheets, results of current physical examination, reports of disciplinary actions by the LUMCON Diving Control Board, and other pertinent information deemed necessary.

1.60 Availability of Records:

- a) Medical records shall be available to the attending physician of a diver or former diver when released in writing by the diver.
- b) Records and documents required by this standard shall be retained by LUMCON for the following period:
 - 1. Physician's written reports of medical examinations for dive team members - 5 years.
 - 2. Diving safety manual - current document only.
 - 3. Records of dive - 1 year, except 5 years where there has been an incident of pressure-related injury.
 - 4. Pressure-related injury assessment - 5 years.
 - 5. Equipment inspection and testing records - current entry or tag, or until equipment is withdrawn from service.

SECTION 2.00 DIVING REGULATIONS FOR SCUBA (OPEN CIRCUIT, COMPRESSED AIR)

2.10 Introduction

No person shall engage in scientific diving operations under the auspices of LUMCON's scientific diving program unless they hold a current certification issued pursuant to the provisions of this standard.

2.20 Pre-Dive Procedures

Dive Plans

Dives should be planned around the competency of the least experienced diver. Before conducting any diving operations under LUMCON auspices, the lead diver for a proposed operation must formulate a dive plan that should include the following:

- a) Divers qualifications, and the type of certificate or certification held by each diver.
- b) Emergency plan (Appendix 7) with the following information:
 1. Name, telephone number, and relationship of person to be contacted for each diver in the event of an emergency.
 2. Nearest operational decompression chamber.
 3. Nearest accessible hospital.
 4. Available means of transport.
- c) Approximate number of proposed dives.
- d) Location(s) of proposed dives.
- e) Estimated depth(s) and bottom time(s) anticipated.
- f) Decompression status and repetitive dive plans, if required.
- g) Proposed work, equipment, and boats to be employed.
- h) Any hazardous conditions anticipated.

Pre-dive Safety Checks

- a) Diver's Responsibility:
 1. Scientific divers shall conduct a functional check of their diving equipment in the presence of the diving buddy or tender.
 2. It is the diver's responsibility and duty to refuse to dive if, in their judgment, conditions are unfavorable, or if they would be violating the precepts of their training, of this standard, or the LUMCON diving safety manual.
 3. No dive team member shall be required to be exposed to hyperbaric conditions against their will, except when necessary to prevent or treat a pressure-related injury.
 4. No dive team member shall be permitted to dive for the duration of any known condition, which is likely to adversely affect the safety and health of the diver or other dive members.

- b) Equipment Evaluations
 - 1. Divers shall ensure that their equipment is in proper working order and that the equipment is suitable for the type of diving operation.
 - 2. Each diver shall have the capability of achieving and maintaining positive buoyancy.
- c) Site Evaluation - Environmental conditions at the site will be evaluated.

2.30 Diving Procedures

Solo Diving Prohibition

All diving activities shall assure adherence to the buddy system for SCUBA diving. This buddy system is based upon mutual assistance, especially in the case of an emergency.

Refusal to Dive

- a) The decision to dive is that of the diver. A diver may refuse to dive, without fear of penalty, whenever they feel it is unsafe for them to make the dive.
- b) Safety - The ultimate responsibility for safety rests with the individual diver. It is the diver's responsibility and duty to refuse to dive if, in their judgment, conditions are unsafe or unfavorable, or if they would be violating the precepts of their training or the regulations in this standard.

Termination of the Dive

- a) It is the responsibility of the diver to terminate the dive, without fear of penalty, whenever they feel it is unsafe to continue the dive, unless it compromises the safety of another diver already in the water.
- b) The dive shall be terminated while there is still sufficient cylinder pressure to permit the diver to safely reach the surface, including decompression time, or to safely reach an additional air source at the decompression station.

Emergencies and Deviations from Regulations

Any diver may deviate from the requirements of this standard to the extent necessary to prevent or minimize a situation that is likely to cause death, serious physical harm, or major environmental damage. A written report of such actions must be submitted to the Diving Control Board explaining the circumstances and justifications.

2.40 Post-Dive Procedures

Post-Dive Safety Checks

- a) After the completion of a dive, each diver shall report any physical problems, symptoms of decompression sickness, or equipment malfunctions.
- b) When diving outside the no-decompression limits, the divers should remain awake for at least 1 hour after diving, and in the company of a dive team member who is prepared to transport them to a decompression chamber if necessary.

2.50 Emergency Procedures

The LUMCON Diving Control Board will develop emergency procedures which follow the standards of care of the community and must include procedures for emergency care, recompression and evacuation for each dive location (Appendix 7).

2.60 Flying After Diving OR Ascending to Altitude (over 1000 feet)

Following a Single No-Decompression Dive: Divers should have a minimum preflight surface interval of 12 hours.

Following Multiple Divers per Day or Multiple Days of Diving: Divers should have a minimum preflight surface interval of 18 hours.

Following Dives Requiring Decompression Stops: Divers should have a minimum preflight surface interval of 24 hours.

Before Ascending to Altitude (above 1000 feet) by Land Transport: Divers should follow the appropriate guideline for preflight surface intervals unless the decompression procedure used has accounted for the increase in the elevation.

2.70 Record Keeping Requirements

Personal Diving Log

Each certified scientific diver shall log every dive made under LUMCON auspices, and is encouraged to log all other dives. Standard forms will be provided by each membership organization. Log sheets shall be submitted to the Diving Safety Officer to be placed in the diver's permanent file. Details of the submission procedures are left to the discretion of the Diving Safety Officer. The diving log shall be in a form specified by the organization and shall include at least the following:

- a) Name of diver, buddy, and Lead Diver.
- b) Date, time, and location.
- c) Diving modes used.
- d) General nature of diving activities.
- e) Approximate surface and underwater conditions.
- f) Maximum depths, bottom time, and surface interval time.
- g) Diving tables or computers used.
- h) Detailed report of any near or actual incidents.

Required Incident Reporting

All diving incidents requiring recompression treatment, or resulting in moderate or serious injury, or death shall be reported to the LUMCON Diving Control Board and the AAUS. LUMCON's regular procedures for incident reporting, including those required by the AAUS, shall be followed. The report will specify the circumstances of the incident and the extent of any injuries or illnesses.

Additional information must meet the following reporting requirements:

- a) LUMCON shall record and report occupational injuries and illnesses in accordance with requirements of the appropriate Labor Code section.

- b) If pressure-related injuries are suspected, or if symptoms are evident, the following additional information shall be recorded and retained by the LUMCON Diving Control Board, with the record of the dive, for a period of 5 years:
1. Complete AAUS Incident Report at <http://www.aaus.org>.
 2. Written descriptive report to include:
 - Name, address, phone numbers of the principal parties involved.
 - Summary of experience of divers involved.
 - Location, description of dive site, and description of conditions that led up to incident.
 - Description of symptoms, including depth and time of onset.
 - Description and results of treatment.
 - Disposition of case.
 - Recommendations to avoid repetition of incident.
- c) The LUMCON Diving Control Board shall investigate and document any incident of pressure-related injury and prepare a report that is forwarded to AAUS during the annual reporting cycle. This report must first be reviewed and released by the LUMCON DCB.

SECTION 3.00 DIVING EQUIPMENT

3.10 General Policy

All equipment shall meet standards as determined by the Diving Safety Officer and the Diving Control Board. Equipment that is subjected to extreme usage under adverse conditions should require more frequent testing and maintenance.

All equipment shall be regularly examined by the person using them.

3.20 Equipment

Regulators

- a) Only those makes and models specifically approved by the Diving Safety Officer and the Diving Control Board shall be used.
- b) SCUBA regulators shall be inspected and tested prior to first use and every 12 months thereafter.
- c) Regulators will consist of a primary second stage and an alternate air source (such as an octopus second stage or redundant air supply).

Breathing Masks and Helmets

Breathing masks and helmets shall have:

- a) A non-return valve at the attachment point between helmet or mask and hose, which shall close readily and positively.
- b) An exhaust valve.
- c) A minimum ventilation rate capable of maintaining the diver at the depth to which they are diving.

SCUBA Cylinders

- a) SCUBA cylinders shall be designed, constructed, and maintained in accordance with the applicable provisions of the Unfired Pressure Vessel Safety Orders.
- b) SCUBA cylinders must be hydrostatically tested in accordance with DOT standards.
- c) SCUBA cylinders must have an internal and external inspection at intervals not to exceed 12 months.
- d) SCUBA cylinder valves shall be functionally tested at intervals not to exceed 12 months.

Backpacks

Backpacks without integrated flotation devices and weight systems shall have a quick release device designed to permit jettisoning with a single motion from either hand.

Gauges

Gauges shall be inspected and tested before first use and every 12 months thereafter.

Flotation Devices

- a) Each diver shall have the capability of achieving and maintaining positive buoyancy.

- b) Personal flotation systems, buoyancy compensators, dry suits, or other variable volume buoyancy compensation devices shall be equipped with an exhaust valve.
- c) These devices shall be functionally inspected and tested at intervals not to exceed 12 months.

Timing Devices, Depth, and Pressure Gauges

Both members of the buddy team must have an underwater timing device, an approved depth indicator, and a submersible pressure gauge.

Determination of Decompression Status: Dive Tables, Dive Computers

- a) A set of diving tables, approved by the Diving Control Board, must be available at the dive location.
- b) Dive computers may be utilized in place of diving tables, and must be approved by the Diving Control Board. AAUS recommendations on dive computers are available at <http://www.aaus.org>

Cutting Device

Must be suitable for cutting through rope, thin wire, plastic line, or other entanglements likely to be encountered.

Snorkel

For surface breathing while swimming to and from dive point, for out-of-air situations

Diver Location Device

Suggested device is the international distress orange sausage float.

Noise-Making Device

A whistle or some sort of noise maker to get attention if needed

Suggested, but not mandatory

Compass
Tank banger

3.30 Auxiliary Equipment

Hand held underwater power tools. Electrical tools and equipment used underwater shall be specifically approved for this purpose. Electrical tools and equipment supplied with power from the surface shall be de-energized before being placed into or retrieved from the water. Hand held power tools shall not be supplied with power from the dive location until requested by the diver.

3.40 Support Equipment

First aid supplies

A first aid kit and emergency oxygen shall be available.

Diver's Flag

A diver's flag shall be displayed prominently whenever diving is conducted under circumstances where required or where water traffic is probable.

Compressor Systems - LUMCON Controlled

The following will be considered in design and location of compressor systems:

- a) Low-pressure compressors used to supply air to the diver if equipped with a volume tank shall have a check valve on the inlet side, a relief valve, and a drain valve.
- b) Compressed air systems over 500 psig shall have slow-opening shut-off valves.
- c) All air compressor intakes shall be located away from areas containing exhaust or other contaminants

3.50 Equipment Maintenance

Record Keeping

Each equipment modification, repair, test, calibration, or maintenance service shall be logged, including the date and nature of work performed, serial number of the item, and the name of the person performing the work for the following equipment:

- a) Regulators
- b) Submersible pressure gauges
- c) Depth gauges
- d) SCUBA cylinders
- e) Cylinder valves
- f) Diving helmets
- g) Submersible breathing masks
- h) Compressors
- i) Gas control panels
- j) Air storage cylinders
- k) Air filtration systems
- l) Analytical instruments
- m) Buoyancy control devices
- n) Dry suits

Compressor Operation and Air Test Records

- a) Gas analyses and air tests shall be performed on each LUMCON-controlled breathing air compressor at regular intervals of no more than 100 hours of operation or 6 months, whichever occurs first. The results of these tests shall be entered in a formal log and be maintained.
- b) A log shall be maintained showing operation, repair, overhaul, filter maintenance, and temperature adjustment for each compressor.

3.60 Air Quality Standards

Breathing air for SCUBA shall meet the following specifications as set forth by the Compressed Gas Association (CGA Pamphlet G-7.1).

CGA Grade E	
Component	Maximum
Oxygen	20 - 22%/v
Carbon Monoxide	10 PPM/v
Carbon Dioxide	1000 PPM/v
Condensed Hydrocarbons	5 mg/m ³
Water Vapor	NS
Objectionable Odors	None

SECTION 4.00 ENTRY-LEVEL TRAINING REQUIREMENTS

This section describes training for the non-diver applicant, previously not certified for diving, and equivalency for the certified diver.

4.10 Evaluation

Medical Examination

The applicant for training shall be certified by a licensed physician to be medically qualified for diving before proceeding with the training as designated in Section 4.20 (Section 6.00 and Appendices 1 through 4).

Swimming Evaluation

Applicant shall successfully perform the following tests, or equivalent, in the presence of the Diving Safety Officer, or an examiner approved by the Diving Safety Officer.

- a) Swim underwater without swim aids for a distance of 25 yards without surfacing.
- b) Swim 400 yards in less than 12 minutes without swim aids.
- c) Tread water for 10 minutes, or 2 minutes without the use of hands, without swim aids.
- d) Without the use of swim aids, transport another person of equal size a distance of 25 yards in the water.

4.20 SCUBA Training

Practical Training

At the completion of training, the trainee must satisfy the Diving Safety Officer or the instructor of their ability to perform the following, as a minimum, in a pool or in sheltered water:

- a) Enter water with full equipment.
- b) Clear face mask.
- c) Demonstrate air sharing, including both buddy breathing and the use of alternate air source, as both donor and recipient, with and without a face mask.
- d) Demonstrate ability to alternate between snorkel and SCUBA while kicking.
- e) Demonstrate understanding of underwater signs and signals.
- f) Demonstrate simulated in-water mouth-to-mouth resuscitation.
- g) Rescue and transport, as a diver, a passive simulated victim of an accident.
- h) Demonstrate ability to remove and replace equipment while submerged.
- i) Demonstrate workmanship, which is acceptable to the instructor.

Workmanship defined: expertise, also ability, achievement, competence, execution, proficiency, quality, skill, technique

Written Examination

Before completing training, the trainee must pass a written examination that demonstrates knowledge of at least the following:

- a) Function, care, use, and maintenance of diving equipment.
- b) Physics and physiology of diving.
- c) Diving regulations and precautions.
- d) Near-shore currents and waves.
- e) Dangerous marine animals.
- f) Emergency procedures, including buoyant ascent and ascent by air sharing.
- g) Currently accepted decompression procedures.
- h) Demonstrate the proper use of dive tables.
- i) Underwater communications.
- j) Aspects of freshwater and altitude diving.
- k) Hazards of breath-hold diving and ascents.
- l) Planning and supervision of diving operations.
- m) Diving hazards.
- n) Cause, symptoms, treatment, and prevention of the following: near drowning, air embolism, carbon dioxide excess, squeezes, oxygen poisoning, nitrogen narcosis, exhaustion and panic, respiratory fatigue, motion sickness, decompression sickness, hypothermia, and hypoxia/anoxia.

Open Water Evaluation

The trainee must satisfy the DSO or an instructor approved by the Diving Safety Officer of their ability to perform at least the following in open water:

- a) Surface dive to a depth of 10 feet in open water without SCUBA.
- b) Demonstrate proficiency in air sharing as both donor and receiver.
- c) Enter and leave open water or surf, or leave and board a diving vessel, while wearing SCUBA gear.
- d) Kick on the surface 400 yards while wearing SCUBA gear, but not breathing from the SCUBA unit.
- e) Demonstrate judgment adequate for safe diving.
- f) Demonstrate, where appropriate, the ability to maneuver efficiently in the environment, at and below the surface.
- g) Complete a simulated emergency swimming ascent.
- h) Demonstrate clearing of mask and regulator while submerged.
- i) Demonstrate ability to achieve and maintain neutral buoyancy while submerged.
- j) Demonstrate techniques of self-rescue and buddy rescue.
- k) Navigate underwater.
- l) Plan and execute a dive.
- m) Successfully complete 5 open water dives for a minimum total time of 3 hours, of which 1-1/2 hours cumulative bottom time must be on SCUBA. No more than 3 training dives shall be made in any 1 day.

SECTION 5.00 SCIENTIFIC DIVER CERTIFICATION

5.10 Certification Types

Scientific Diver Certification

This is a permit to dive, usable only while it is current and for the purpose intended.

Temporary Diver Permit

This permit constitutes a waiver of the requirements of Section 5.00 and is issued only following a demonstration of the required proficiency in diving. It is valid only for a limited time, as determined by the Diving Safety Officer. This permit is not to be construed as a mechanism to circumvent existing standards set forth in this standard.

- a) Requirements of this section may be waived by the Diving Safety Officer if the person in question has demonstrated proficiency in diving and can contribute measurably to a planned dive. A statement of the temporary diver's qualifications shall be submitted to the Diving Safety Officer as a part of the dive plan. Temporary permits shall be restricted to the planned diving operation and shall comply with all other policies, regulations, and standards of this standard, including medical requirements.

5.20 General Policy

AAUS requires that no person shall engage in scientific diving unless that person is authorized by an organizational member pursuant to the provisions of this standard. Only a person diving under the auspices of the organizational member that subscribes to the practices of AAUS is eligible for a scientific diver certification.

5.30 Requirements for Scientific Diver Certification

Submission of documents and participation in aptitude examinations does not automatically result in certification. The applicant must convince the Diving Safety Officer and members of the DCB that they are sufficiently skilled and proficient to be certified. This skill will be acknowledged by the signature of the Diving Safety Officer. Any applicant who does not possess the necessary judgment, under diving conditions, for the safety of the diver and their partner, may be denied LUMCON scientific diving privileges. Minimum documentation and examinations required are as follows:

Prerequisites

- a) Application - Application for certification shall be made to the Diving Safety Officer on the form prescribed by the LUMCON Diving Control Board (**Appendices B-E**).
- b) Medical approval. Each applicant for diver certification shall submit a statement from a licensed physician, based on an approved medical examination, attesting to the applicant's fitness for diving (Section 6.00 and Appendices 1 through 4).
- c) Scientific Diver-In-Training Permit - This permit signifies that a diver has completed and been certified as at least an open water diver through an internationally recognized certifying agency or scientific diving program, and has the knowledge

skills and experience to that gained by successful completion of training as specified in Section 4.00. **Appendix I that provides a checklist of completed steps approved by the DSO serves as the permit.**

Theoretical and Practical Training

The diver must complete theoretical aspects and practical training for a minimum cumulative time of 100 hours. Theoretical aspects shall include principles and activities appropriate to the intended area of scientific study.

a) Required Topics (include, but not limited to):

1. Diving Emergency Care Training
 - Cardiopulmonary Resuscitation (CPR)
 - Standard or Basic First Aid
 - Recognition of DCS and AGE
 - Accident Management
 - Field Neurological Exam
 - Oxygen Administration
2. Dive Rescue
3. Dive Physics
4. Dive Physiology
5. Dive Environments
6. Decompression Theory and Its Application
7. AAUS Scientific Diving Regulations and History
 - Scientific Dive Planning
 - Coordination with other Agencies
 - Appropriate Governmental Regulations
8. Scientific Method
9. Data Gathering Techniques (Only Items specific to area of study are required)
 - Quadrating
 - Transecting
 - Mapping
 - Coring
 - Photography
 - Tagging
 - Collecting
 - Animal Handling
 - Archaeology
 - Common Biota
 - Organism Identification
 - Behavior
 - Ecology
 - Site Selection, Location, and Re-location
 - Specialized Equipment for data gathering
10. HazMat Training
 - HP Cylinders
 - Chemical Hygiene, Laboratory Safety (Use of Chemicals)

b) Suggested Topics (include, but not limited to):

1. Specific Dive Modes (methods of gas delivery)
 - Open Circuit
 - Hookah

- Surface Supplied Diving
- 2. Small Boat Operation
- 3. Rebreathers
 - Closed
 - Semi-closed
- 4. Specialized Breathing Gas
 - Nitrox
 - Mixed Gas
- 5. Specialized Environments and Conditions
 - Blue Water Diving,
 - Ice and Polar Diving (Cold Water Diving)
 - Zero Visibility Diving
 - Polluted Water Diving,
 - Saturation Diving
 - Decompression Diving
 - Overhead Environments
 - Aquarium Diving
 - Night Diving
 - Kelp Diving
 - Strong Current Diving (Live-boating)
 - Potential Entanglement
- 6. Specialized Diving Equipment
 - Full face mask
 - Dry Suit
 - Communications

LUMCON uses four written examinations that cover the same information but contain different questions and different number of questions. Study guides include *Encyclopedia of Diving* (PADI 3rd Ed. of The Encyclopedia of Recreational Diving, ISBN # 1-878663-02-X) or any instruction book associated with Open Water diver certification. If an applicant does not pass the written exam, s/he will be eligible to re-take it after two weeks, allowing for additional study time. The DSO may recommend additional reading for the applicant.

- c) Practical training must include a checkout dive, with evaluation of the skills listed in Section 4.20 (Open Water Evaluation), with the DSO or qualified delegate (AAUS certified Scientific Diver) followed by at least 11 ocean or open water dives in a variety of dive sites and diving conditions, for a cumulative bottom time of 6 hours. Dives following the checkout dive must be supervised by a certified Scientific Diver with experience in the type of diving planned, with the knowledge and permission of the DSO.
- d) Examinations
 - 1. Written examination
 - General exam required for scientific diver certification.
 - Examination covering the suggested topics at the DSO's discretion.
 - 2. Examination of equipment.
 - Personal diving equipment

- Task specific equipment

5.40 Depth Certifications

Depth Certifications and Progression to Next Depth Level

A certified diver diving under LUMCON auspices may progress to the next depth level after successfully completing the required dives for the next level. Under these circumstances the diver may exceed their depth limit. Dives shall be planned and executed under close supervision of a diver certified to this depth, with the knowledge and permission of the DSO.

Either the DSO, or designee, must provide proof of certification, i.e., dive logs verified by a diver certified to the next depth, and sign the certification depth form to acknowledge that they have verified the depth qualifications (see Appendix O).

- a) Certification to 30 Foot Depth - Initial permit level, approved upon the successful completion of training listed in Section 4.00 and 5.30.
- b) Certification to 60 Foot Depth - A diver holding a 30 foot certificate may be certified to a depth of 60 feet after successfully completing, under supervision, 12 logged training dives to depths between 31 and 60 feet, for a minimum total time of 4 hours.
- c) Certification to 100 Foot Depth - A diver holding a 60 foot certificate may be certified to a depth of 100 feet after successfully completing, 4 dives to depths between 61 and 100 feet. The diver shall also demonstrate proficiency in the use of the appropriate Dive Tables.
- d) Certification to 130 Foot Depth - A diver holding a 100 foot certificate may be certified to a depth of 130 feet after successfully completing, 4 dives to depths between 100 and 130 feet. The diver shall also demonstrate proficiency in the use of the appropriate Dive Tables.
- e) Certification to 150 Foot Depth - A diver holding a 130 foot certificate may be certified to a depth of 150 feet after successfully completing, 4 dives to depths between 130 and 150 feet. The diver must also demonstrate knowledge of the special problems of deep diving, and of special safety requirements.
- f) Certification to 190 Foot Depth - A diver holding a 150 foot certificate may be certified to a depth of 190 feet after successfully completing, 4 dives to depths between 150 and 190 feet. The diver must also demonstrate knowledge of the special problems of deep diving, and of special safety requirements.

Diving on air is not permitted beyond a depth of 190 feet.

5.50 Continuation of Certificate

Minimum Activity to Maintain Certification

During any 12-month period, each certified scientific diver must log a minimum of 12 dives. At least one dive must be logged near the maximum depth of the diver's certification during each 6-month period. Divers certified to 150 feet or deeper may satisfy these requirements with dives to 130 feet or over. Failure to meet these requirements may be cause for revocation or restriction of certification.

Re-qualification of Depth Certificate

Once the initial certification requirements of Section 5.30 are met, divers whose depth certification has lapsed due to lack of activity may be re-qualified by procedures adopted by the organization's DCB.

Medical Examination

All certified scientific divers shall pass a medical examination at the intervals specified in Section 6.10. After each major illness or injury, as described in Section 6.10, a certified scientific diver shall receive clearance to return to diving from a physician before resuming diving activities.

5.60 Revocation of Certification

A diving certificate may be revoked or restricted for cause by the Diving Safety Officer or the DCB. Violations of regulations set forth in this standard, or other governmental subdivisions not in conflict with this standard, may be considered cause. Diving Safety Officer shall inform the diver in writing of the reason(s) for revocation. The diver will be given the opportunity to present their case in writing for reconsideration and/or re-certification. All such written statements and requests, as identified in this section, are formal documents, which will become part of the diver's file.

5.70 Recertification

If a diver's certificate expires or is revoked, they may be re-certified after complying with such conditions as the Diving Safety Officer or the DCB may impose. The diver shall be given an opportunity to present their case to the DCB before conditions for re-certification are stipulated.

SECTION 6.00 MEDICAL STANDARDS

6.10 Medical Requirements

General

- a) The LUMCON Diving Safety Officer shall determine that divers have passed a current diving physical examination and have been declared by the examining physician to be fit to engage in diving activities as may be limited or restricted in the medical evaluation report.
- b) All medical evaluations required by this standard shall be performed by, or under the direction of, a licensed physician of the applicant-diver's choice, preferably one trained in diving/undersea medicine.
- c) The diver should be free of any chronic disabling disease and be free of any conditions contained in the list of conditions for which restrictions from diving are generally recommended. (Appendix 1)

Frequency of Medical Evaluations

Medical evaluation shall be completed:

- a) Before a diver may begin diving, unless an equivalent initial medical evaluation has been given within the preceding 5 years (3 years if over the age of 40, 2 years if over the age of 60), the member organization has obtained the results of that examination, and those results have been reviewed and found satisfactory by the member organization.
- b) Thereafter, at 5 year intervals up to age 40, every 3 years after the age of 40, and every 2 years after the age of 60.
- c) Clearance to return to diving must be obtained from a physician following any major injury or illness, or any condition requiring hospital care. If the injury or illness is pressure related, then the clearance to return to diving must come from a physician trained in diving medicine.

Information Provided Examining Physician

The LUMCON Diving Control Board shall provide a copy of the medical evaluation requirements of this standard to the examining physician. (Appendices 1, 2, and 3).

Content of Medical Evaluations

Medical examinations conducted initially and at the intervals specified in Section 6.10 shall consist of the following:

- a) Applicant agreement for release of medical information to the Diving Safety Officer and the DCB (Appendix 2).
- b) Medical history (Appendix 3).
- c) Diving physical examination (Required tests listed below and in Appendix 2).

Conditions Which May Disqualify Candidates from Diving (Adapted from Bove, 1998)

- a) Abnormalities of the tympanic membrane, such as perforation, presence of a monomeric membrane, or inability to auto inflate the middle ears.
- b) Vertigo including Meniere's Disease.

- c) Stapedectomy or middle ear reconstructive surgery.
- d) Recent ocular surgery.
- e) Psychiatric disorders including claustrophobia, suicidal ideation, psychosis, anxiety states, depression.
- f) Substance abuse, including alcohol.
- g) Episodic loss of consciousness.
- h) History of seizure.
- i) History of stroke or a fixed neurological deficit.
- j) Recurring neurological disorders, including transient ischemic attacks.
- k) History of intracranial aneurysm, other vascular malformation or intracranial hemorrhage.
- l) History of neurological decompression illness with residual deficit.
- m) Head injury.
- n) Hematologic disorders including coagulopathies.
- o) Evidence of coronary artery disease or high risk for coronary artery disease.
- p) Atrial septal defects.
- q) Significant valvular heart disease - isolated mitral valve prolapse is not disqualifying.
- r) Significant cardiac rhythm or conduction abnormalities.
- s) Implanted cardiac pacemakers and cardiac defibrillators (ICD).
- t) Inadequate exercise tolerance.
- u) Hypertension.
- v) History of pneumothorax.
- w) Asthma.
- x) Chronic pulmonary disease, including radiographic evidence of pulmonary blebs, bullae or cysts.
- y) Diabetes mellitus.
- z) Pregnancy.

Laboratory Requirements for Diving Medical Evaluation and Intervals.

- a) Initial examination under age 40:
 - Medical History
 - Complete Physical Exam, emphasis on neurological and otological components
 - Urinalysis
 - Any further tests deemed necessary by the physician.
- b) Periodic re-examination under age 40 (every 5 years):
 - Medical History
 - Complete Physical Exam, emphasis on neurological and otological components
 - Urinalysis
 - Any further tests deemed necessary by the physician
- c) Initial exam over age 40:
 - Medical History
 - Complete Physical Exam, emphasis on neurological and otological components
 - Detailed assessment of coronary artery disease risk factors using Multiple-Risk-Factor Assessment¹
(age, family history, lipid profile, blood pressure, diabetic screening, smoker).
Further cardiac screening may be indicated based on risk factor assessment.

- Resting EKG
 - Chest X-ray
 - Urinalysis
 - Any further tests deemed necessary by the physician
- d) Periodic re-examination over age 40 (every 3 years); over age 60 (every 2 years):
- Medical History
 - Complete Physical Exam, emphasis on neurological and otological components
 - Detailed assessment of coronary artery disease using Multiple-Risk-Factor Assessment¹
 (age, family history, lipid profile, blood pressure, diabetic screening, smoker).
 Further cardiac screening may be indicated based on risk factor assessment
 - Urinalysis
 - Resting EKG
 - Any further tests deemed necessary by the physician
- e) Physician's Written Report
1. After any medical examination relating to the individual's fitness to dive, the LUMCON Diving Control Board shall obtain a written report prepared by the examining physician that shall contain the examining physician's opinion of the individual's fitness to dive, including any recommended restrictions or limitations. This will be reviewed by the DCB.
 2. The LUMCON Diving Control Board shall make a copy of the physician's written report available to the individual.

¹ "Assessment of Cardiovascular Risk by Use of Multiple-Risk-Factor Assessment Equations." Grundy et. al. 1999. AHA/ACC Scientific Statement. <http://www.acc.org/clinical/consensus/risk/risk1999.pdf>

Volume 2

Sections 7.00 through 13.00

Required Only When Conducting Described Diving Activities

SECTION 7.00 NITROX DIVING GUIDELINES

The following guidelines address the use of Nitrox by scientific divers under the auspices of an AAUS Organizational Member. Nitrox is defined for these guidelines as breathing mixtures composed predominately of nitrogen and oxygen, most commonly produced by the addition of oxygen or the removal of nitrogen from air.

7.10 Prerequisites

Eligibility

Only a certified Scientific Diver or Scientific Diver-in-Training (Sections 4.00 and 5.00) diving under the auspices of a member organization is eligible for authorization to use Nitrox. After completion, review and acceptance of application materials, training and qualification, an applicant will be authorized to use Nitrox within their depth authorization, as specified in Section 5.40.

Application and Documentation

Application and documentation for authorization to use Nitrox should be made on forms specified by the Diving Control Board.

7.20 Requirements for Authorization to Use Nitrox

Submission of documents and participation in aptitude examinations does not automatically result in authorization to use Nitrox. The applicant must convince the DSO and members of the DCB that they are sufficiently skilled and proficient. The signature of the DSO on the authorization form will acknowledge authorization. After completion of training and evaluation, authorization to use Nitrox may be denied to any diver who does not demonstrate to the satisfaction of the DSO or DCB the appropriate judgment or proficiency to ensure the safety of the diver and dive buddy.

Prior to authorization to use Nitrox, the following minimum requirements should be met:

Training

The diver must complete additional theoretical and practical training beyond the Scientific Diver-in-Training air certification level, to the satisfaction of the member organizations DSO and DCB (Section 7.30).

Examinations

Each diver should demonstrate proficiency in skills and theory in written, oral, and practical examinations covering:

- a) Written examinations covering the information presented in the classroom training session(s) (i.e., gas theory, oxygen toxicity, partial pressure determination, etc.);
- b) Practical examinations covering the information presented in the practical training session(s) (i.e., gas analysis, documentation procedures, etc.);
- c) Open water checkout dives, to appropriate depths, to demonstrate the application of theoretical and practical skills learned.

Minimum Activity to Maintain Authorization

The diver should log at least one Nitrox dive per year. Failure to meet the minimum activity level may be cause for restriction or revocation of Nitrox authorization.

7.30 Nitrox Training Guidelines

Training in these guidelines should be in addition to training for Diver-in-Training authorization (Section 4.00). It may be included as part of training to satisfy the Scientific Diver training requirements (Section 5.30).

Classroom Instruction

- a) Topics should include, but are not limited to: review of previous training; physical gas laws pertaining to Nitrox; partial pressure calculations and limits; equivalent air depth (EAD) concept and calculations; oxygen physiology and oxygen toxicity; calculation of oxygen exposure and maximum safe operating depth (MOD); determination of decompression schedules (both by EAD method using approved air dive tables, and using approved Nitrox dive tables); dive planning and emergency procedures; mixing procedures and calculations; gas analysis; personnel requirements; equipment marking and maintenance requirements; dive station requirements.
- b) DCB may choose to limit standard Nitrox diver training to procedures applicable to diving, and subsequently reserve training such as Nitrox production methods, oxygen cleaning, and dive station topics to divers requiring specialized authorization in these areas.

Practical Training

The practical training portion will consist of a review of skills as stated for SCUBA (Section 4.00), with additional training as follows:

- a) Oxygen analysis of Nitrox mixtures.
- b) Determination of MOD, oxygen partial pressure exposure, and oxygen toxicity time limits, for various Nitrox mixtures at various depths.
- c) Determination of nitrogen-based dive limits status by EAD method using air dive tables, and/or using Nitrox dive tables, as approved by the DCB.
- d) Nitrox dive computer use may be included, as approved by the DCB.

Written Examination (based on classroom instruction and practical training)

Before authorization, the trainee should successfully pass a written examination demonstrating knowledge of at least the following:

- a) Function, care, use, and maintenance of equipment cleaned for Nitrox use.
- b) Physical and physiological considerations of Nitrox diving (ex.: O₂ and CO₂ toxicity).
- c) Diving regulations and procedures as related to Nitrox diving, either SCUBA or surface-supplied (depending on intended mode).
- d) Given the proper information, calculation of:

1. equivalent air depth (EAD) for a given fO_2 and actual depth
 2. pO_2 exposure for a given fO_2 and depth;
 3. Optimal Nitrox mixture for a given pO_2 exposure limit and planned depth;
 4. Maximum operational depth (MOD) for a given mix and pO_2 exposure limit;
 5. For Nitrox production purposes, percentages/psi of oxygen present in a given mixture, and psi of each gas required to produce a fO_2 by partial pressure mixing.
- e) Dive table and dive computer selection and usage;
 - f) Nitrox production methods and considerations.
 - g) Oxygen analysis.
 - h) Nitrox operational guidelines (Section 7.40), dive planning, and dive station components.

Open Water Dives

A minimum of two supervised open water dives using Nitrox is required for authorization. The mode used in the dives should correspond to the intended application (i.e., SCUBA or surface-supplied). If the MOD for the mix being used can be exceeded at the training location, direct, in-water supervision is required.

Surface-Supplied Training

All training as applied to surface-supplied diving (practical, classroom, and open water) will follow the member organization's surface-supplied diving standards, including additions listed in Section 11.60.

7.40 Scientific Nitrox Diving Regulations

Dive Personnel Requirements

- a) Nitrox Diver-in-Training - A Diver-in-Training, who has completed the requirements of Section 4.00 and the training and authorization sections of these guidelines, may be authorized by the DSO to use Nitrox under the direct supervision a Scientific Diver who also holds Nitrox authorization. Dive depths should be restricted to those specified in the diver's authorization.
- b) Scientific Diver - A Scientific Diver who has completed the requirements of Section 5.00 and the training and authorization sections of these guidelines, may be authorized by the DSO to use Nitrox. Depth authorization to use Nitrox should be the same as those specified in the diver's authorization, as described in Section. 5.40.
- c) Lead Diver - On any dive during which Nitrox will be used by any team member, the Lead Diver should be authorized to use Nitrox, and hold appropriate authorizations required for the dive, as specified in AAUS Standards. Lead Diver authorization for Nitrox dives by the DSO and/or DCB should occur as part of the dive plan approval process.

In addition to responsibilities listed in Section 1.20, the Lead Diver should:

1. As part of the dive planning process, verify that all divers using Nitrox on a dive are properly qualified and authorized;
2. As part of the pre-dive procedures, confirm with each diver the Nitrox mixture the diver is using, and establish dive team maximum depth and time limits, according to the shortest time limit or shallowest depth limit among the team members.
3. The Lead Diver should also reduce the maximum allowable pO₂ exposure limit for the dive team if on-site conditions so indicate (see Sec. 7.42.).

Dive Parameters

a) Oxygen Exposure Limits

1. The inspired oxygen partial pressure experienced at depth should not exceed 1.6 ATA. All dives performed using Nitrox breathing mixtures should comply with the current *NOAA Diving Manual* “Oxygen Partial Pressure Limits for ‘Normal’ Exposures”
2. The maximum allowable exposure limit should be reduced in cases where cold or strenuous dive conditions, or extended exposure times are expected. The DCB should consider this in the review of any dive plan application, which proposes to use Nitrox. The Lead Diver should also review on-site conditions and reduce the allowable pO₂ exposure limits if conditions indicate.
3. If using the equivalent air depth (EAD) method the maximum depth of a dive should be based on the oxygen partial pressure for the specific Nitrox breathing mix to be used.

b) Bottom Time Limits

1. Maximum bottom time should be based on the depth of the dive and the Nitrox mixture being used.
2. Bottom time for a single dive should not exceed the NOAA maximum allowable “Single Exposure Limit” for a given oxygen partial pressure, as listed in the current *NOAA Diving Manual*.

c) Dive Tables and Gases

1. A set of DCB approved Nitrox dive tables should be available at the dive site.
2. When using the equivalent air depth (EAD) method, dives should be conducted using air dive tables approved by the DCB.
3. If Nitrox is used to increase the safety margin of air-based dive tables, the MOD and oxygen exposure and time limits for the Nitrox mixture being dived should not be exceeded
4. Breathing mixtures used while performing in-water decompression, or for bail-out purposes, should contain the same or greater oxygen content as that being used during the dive, within the confines of depth limitations and oxygen partial pressure limits set forth in Section 7.40 Dive Parameters.

d) Nitrox Dive Computers

1. Dive computers may be used to compute decompression status during Nitrox dives. Manufacturers' guidelines and operations instructions should be followed.
 2. Use of Nitrox dive computers should comply with dive computer guidelines included in the AAUS Standards.
 3. Nitrox dive computer users should demonstrate a clear understanding of the display, operations, and manipulation of the unit being used for Nitrox diving prior to using the computer, to the satisfaction of the DSO or designee.
 4. If Nitrox is used to increase the safety margin of an air-based dive computer, the MOD and oxygen exposure and time limits for the Nitrox mixture being dived should not be exceeded.
 5. Dive computers capable of pO₂ limit and fO₂ adjustment should be checked by the diver prior to the start each dive to assure compatibility with the mix being used.
- e) Repetitive Diving
6. Repetitive dives using Nitrox mixtures should be performed in compliance with procedures required of the specific dive tables used.
 7. Residual nitrogen time should be based on the EAD for the specific Nitrox mixture to be used on the repetitive dive, and not that of the previous dive.
 8. The total cumulative exposure (bottom time) to a partial pressure of oxygen in a given 24 hour period should not exceed the current *NOAA Diving Manual* 24-hour Oxygen Partial Pressure Limits for "Normal" Exposures.
 9. When repetitive dives expose divers to different oxygen partial pressures from dive to dive, divers should account for accumulated oxygen exposure from previous dives when determining acceptable exposures for repetitive dives. Both acute (CNS) and chronic (pulmonary) oxygen toxicity concerns should be addressed.
- f) Oxygen Parameters
1. Authorized Mixtures - Mixtures meeting the criteria outlined in Section 7.40 may be used for Nitrox diving operations, upon approval of the DCB.
 2. Purity - Oxygen used for mixing Nitrox-breathing gas should meet the purity levels for "Medical Grade" (U.S.P.) or "Aviator Grade" standards.

In addition to the AAUS Air Purity Guidelines (Section 3.60), the following standard should be met for breathing air that is either:

- Placed in contact with oxygen concentrations greater than 40%.
- Used in Nitrox production by the partial pressure mixing method with gas mixtures containing greater than 40% oxygen as the enriching agent.

Air Purity: CGA Grade E (Section 3.60)-

<u>Condensed</u>	
<u>Hydrocarbons</u>	<u>5mg/m³</u>
<u>Hydrocarbon Contaminants</u>	<u>No greater than 0.1</u>
<u>mg/m³</u>	

- h) Gas Mixing and Analysis for LUMCON

1. Personnel Requirements
 - a). Individuals responsible for producing and/or analyzing Nitrox mixtures should be knowledgeable and experienced in all aspects of the technique.
 - b). Only those individuals approved by the DSO and/or DCB should be responsible for mixing and/or analyzing Nitrox mixtures.
2. Production Methods - It is the responsibility of the DCB to approve the specific Nitrox production method used.
3. Analysis Verification by User
 - a). It is the responsibility of each diver to analyze prior to the dive the oxygen content of his/her SCUBA cylinder and acknowledge in writing the following information for each cylinder: fO₂, MOD, cylinder pressure, date of analysis, and user's name.
 - b). Individual dive log reporting forms should report fO₂ of Nitrox used, if different than 21%.

7.50 Nitrox Diving Equipment

All of the designated equipment and stated requirements regarding SCUBA equipment required in the AAUS Standards should apply to Nitrox SCUBA operations. Additional minimal equipment necessary for Nitrox diving operations includes:

- Labeled SCUBA Cylinders
- Oxygen Analyzers

Oxygen Cleaning and Maintenance Requirements

- a) Requirement for Oxygen Service
 1. All equipment, which during the dive or cylinder filling process is exposed to concentrations greater than 40% oxygen at pressures above 150 psi, should be cleaned and maintained for oxygen service.
 2. Equipment used with oxygen or mixtures containing over 40% by volume oxygen shall be designed and maintained for oxygen service. Oxygen systems over 125 psig shall have slow-opening shut-off valves. This should include the following equipment: SCUBA cylinders, cylinder valves, SCUBA and other regulators, cylinder pressure gauges, hoses, diver support equipment, compressors, and fill station components and plumbing.
- b) SCUBA Cylinder Identification Marking

SCUBA cylinders to be used with Nitrox mixtures should have the following identification documentation affixed to the cylinder.

1. Cylinders should be marked "NITROX", or "EANx", or "Enriched Air".
 2. Nitrox identification color-coding should include a 4-inch wide green band around the cylinder, starting immediately below the shoulder curvature. If the cylinder is not yellow, the green band should be bordered above and below by a 1-inch yellow band.
 3. The alternate marking of a yellow cylinder by painting the cylinder crown green and printing the word "NITROX" parallel to the length of the cylinder in green print is acceptable.
 4. Other markings, which identify the cylinder as containing gas mixes other than Air, may be used as the approval of the DCB.
 5. A contents label should be affixed, to include the current fO_2 , date of analysis, and MOD.
 6. The cylinder should be labeled to indicate whether the cylinder is prepared for oxygen or Nitrox mixtures containing greater than 40% oxygen.
- c) Regulators - Regulators to be used with Nitrox mixtures containing greater than 40% oxygen should be cleaned and maintained for oxygen service, and marked in an identifying manner.
- d) Other Support Equipment
1. An oxygen analyzer is required which is capable of determining the oxygen content in the SCUBA cylinder. Two analyzers are recommended to reduce the likelihood of errors due to a faulty analyzer. The analyzer should be capable of reading a scale of 0 to 100% oxygen, within 1% accuracy.
 2. All diver and support equipment should be suitable for the fO_2 being used.
- e) Compressor system
1. Compressor/filtration system must produce oil-free air.
 2. An oil-lubricated compressor placed in service for a Nitrox system should be checked for oil and hydrocarbon contamination at least quarterly.
- f) Fill Station Components - All components of a Nitrox fill station that will contact Nitrox mixtures containing greater than 40% oxygen should be cleaned and maintained for oxygen service. This includes cylinders, whips, gauges, valves, and connecting lines.

Section 8.00 AQUARIUM DIVING OPERATIONS

8.10 General Policy

Section 8.00 applies to scientific aquarium divers only.

Definition - A scientific aquarium diver is a scientific diver who is diving solely within an aquarium. An aquarium is a shallow, confined body of water, which is operated by or under the control of an institution and is used for the purposes of specimen exhibit, education, husbandry, or research.

It is recognized that within scientific aquarium diving there are environments and equipment that fall outside the scope of those addressed in this standard. In those circumstances it is the responsibility of the LUMCON's Diving Control Board to establish the requirements and protocol under which diving will be safely conducted.

Note: All of the standards set forth in other sections of this standard shall apply, except as otherwise provided in this section.

8.20 The Buddy System in Scientific Aquarium Diving

All SCUBA diving activities in the confined environment of an aquarium shall be conducted in accordance with the buddy system, whereby both divers, or a diver and a tender as provided below, are always in visual contact with one another, can always communicate with one another, and can always render prompt and effective assistance either in response to an emergency or to prevent an emergency.

A diver and tender comprise a buddy team in the confined environment of an aquarium only when the maximum depth does not exceed 30 feet, and there are no overhead obstructions or entanglement hazards for the diver, and the tender is equipped, ready and able to conduct or direct a prompt and effective in-water retrieval of the diver at all times during the dive.

8.30 Diving Equipment

Section 3.20 is modified to read as follows:

In an aquarium of a known maximum obtainable depth:

- a) A depth indicator is not required, except that a repetitive diver shall use the same computer used on any prior dive.
- b) Only one buddy must be equipped with a timing device.
- c) The maximum obtainable depth of the aquarium shall be used as the diving depth.

8.40 Scientific Aquarium Diver Certification

A Scientific Aquarium Diver is a certification enabling the qualified diver to participate in scientific diving in accordance with Section 8.00 as provided below.

All of the standards set forth in sections 4.0 and 5.0 of this standard shall apply, except that Section 5.30 of this standard is modified to read as follows:

Practical training shall include at least 12 supervised aquarium dives for a cumulative bottom time of 6 hours. No more than 3 of these dives shall be made in 1 day.

8.50 Scientific Aquarium Diving Using Other Diving Technology

Surface Supplied Scientific Aquarium Diving

Definition: For purposes of scientific aquarium diving, surface supplied diving is described as a mode of diving using open circuit, surface supplied compressed gas which is provided to the diver at the dive location and may or may not include voice communication with the surface tender.

- a) Divers using the surface supplied mode shall be equipped with a diver-carried independent reserve breathing gas supply.
Scientific aquarium divers using conventional SCUBA masks, full-face masks, or non-lockdown type helmets are exempt from this standard provided:
 1. There are no overhead obstructions or entanglements.
 2. The diver is proficient in performing a Controlled Emergency Swimming Ascent from at least as deep as the maximum depth of the aquarium.
 3. The diver is proficient in performing out of air emergency drills, including ascent and mask/helmet removal.
 4. Each surface supplied diver shall be hose-tended by a separate dive team member while in the water. Scientific aquarium divers are exempt from this standard, provided the tender is monitoring only one air source, there is mutual assistance between divers and there are no overhead obstructions or entanglements.
- b) Divers using the surface supplied mode shall maintain communication with the surface tender. The surface supplied breathing gas supply (volume and intermediate pressure) shall be sufficient to support all surface supplied divers in the water for the duration of the planned dive.
- c) During surface supplied diving operations when only one diver is in the water, there must be a standby diver in attendance at the dive location. Scientific aquarium divers are exempt from this standard, provided the tender is equipped, ready and able to conduct a prompt and effective in-water retrieval of the diver at all times during the dive.”
- d) Surface supplied equipment must be configured to allow retrieval of the diver by the surface tender without risk of interrupting air supply to the diver.
- e) All surface supplied applications used for scientific aquarium diving shall have a non-return valve at the attachment point between helmet or mask hose, which shall close readily and positively.

SECTION 9.00 STAGED DECOMPRESSION DIVING

Decompression diving shall be defined as any diving during which the diver cannot perform a direct return to the surface without performing a mandatory decompression stop to allow the release of inert gas from the diver's body.

The following procedures shall be observed when conducting dives requiring planned decompression stops.

9.10 Minimum Experience and Training Requirements

a) Prerequisites:

- 1) Scientific Diver qualification according to Section 5.00.
- 2) Minimum of 100 logged dives.
- 3) Demonstration of the ability to safely plan and conduct dives deeper than 100 feet.
- 4) Nitrox certification/authorization according to AAUS Section 7.00 recommended.

b) Training shall be appropriate for the conditions in which dive operations are to be conducted.

c) Minimum Training shall include the following

- 1) A minimum of 6 hours of classroom training to ensure theoretical knowledge to include: physics and physiology of decompression; decompression planning and procedures; gas management; equipment configurations; decompression method, emergency procedures.
- 2) It is recommended that at least one training session be conducted in a pool or sheltered water setting, to cover equipment handling and familiarization, swimming and buoyancy control, to estimate gas consumption rates, and to practice emergency procedures.
- 3) At least 6 open-water training dives simulating/requiring decompression shall be conducted, emphasizing planning and execution of required decompression dives, and including practice of emergency procedures.
- 4) Progression to greater depths shall be by 4-dive increments at depth intervals as specified in Section 5.40.
- 5) No training dives requiring decompression shall be conducted until the diver has demonstrated acceptable skills under simulated conditions.
- 6) The following are the minimum skills the diver must demonstrate proficiently during dives simulating and requiring decompression:
 - Buoyancy control
 - Proper ascent rate
 - Proper depth control
 - Equipment manipulation
 - Stage/decompression bottle use as pertinent to planned diving operation
 - Buddy skills
 - Gas management
 - Time management
 - Task loading
 - Emergency skills

- 7) Divers shall demonstrate to the satisfaction of the DSO or the DSO's designee proficiency in planning and executing required decompression dives appropriate to the conditions in which diving operations are to be conducted.
- 8) Upon completion of training, the diver shall be authorized to conduct required decompression dives with DSO approval.

9.20 Minimum Equipment Requirements:

- a) Valve and regulator systems for primary (bottom) gas supplies shall be configured in a redundant manner that allows continuous breathing gas delivery in the event of failure of any one component of the regulator/valve system.
- b) Cylinders with volume and configuration adequate for planned diving operations.
- c) One of the second stages on the primary gas supply shall be configured with a hose of adequate length to facilitate effective emergency gas sharing in the intended environment.
- d) Minimum dive equipment shall include:
 1. Snorkel. Necessary for surface swimming or for out-of-air at surface.
 2. Diver location devices adequate for the planned diving operations and environment. Suggested device is the international distress orange sausage float.
 3. Depth gauges
 4. Compass
 5. Cutting device, adequate to cut through entanglement situations
 6. A whistle or some sort of noise-making device to get attention if needed
- e) Redundancy in the following components is desirable or required at the discretion of the DCB or DSO:
 1. Decompression Schedules
 2. Dive Timing Devices
 3. Depth gauges
 4. Buoyancy Control Devices
 5. Lift bags and line reels

9.30 Minimum Operational Requirements

- a) Approval of dive plan applications to conduct required decompression dives shall be on a case-by-case basis.
- b) The maximum pO_2 to be used for planning required decompression dives is 1.6. It is recommended that a pO_2 of less than 1.6 be used during bottom exposure.
- c) Divers gas supplies shall be adequate to meet planned operational requirements and foreseeable emergency situations.
- d) Decompression dives may be planned using dive tables, dive computers, and/or PC software approved by the DSO/DCB.
- e) Breathing gases used while performing in-water decompression shall contain the same or greater oxygen content as that used during the bottom phase of the dive.
- f) The dive team prior to each dive shall review emergency procedures appropriate

- for the planned dive.
- g) If breathing gas mixtures other than air are used for required decompression, their use shall be in accordance with those regulations set forth in the appropriate sections of this standard.
 - h) The maximum depth for required decompression using air as the bottom gas shall be 190 feet.
 - i) Use of additional Nitrox and/or high-oxygen fraction decompression mixtures as travel and decompression gases to decrease decompression obligations is encouraged.
 - j) Use of alternate inert gas mixtures to limit narcosis is encouraged for depths greater than 150 feet.
 - k) If a period of more than 6 months has elapsed since the last mixed gas dive, a series of progressive workup dives to return the diver(s) to proficiency status prior to the start of project diving operations are recommended.
 - l) Mission specific workup dives are recommended.

SECTION 10.00 MIXED GAS DIVING

Mixed gas diving is defined as dives done while breathing gas mixes containing proportions greater than 1% by volume of an inert gas other than nitrogen.

10.10 Minimum Experience and Training Requirements

- a) Prerequisites:
 - 1. Nitrox certification and authorization (Section 7.00)
 - 2. If the intended use entails required decompression stops, divers will be previously certified and authorized in decompression diving (Section 9.00).
 - 3. Divers shall demonstrate to the DCB's satisfaction skills, knowledge, and attitude appropriate for training in the safe use of mixed gases.
- b) Classroom training including:
 - 1. Review of topics and issues previously outlined in Nitrox and required decompression diving training as pertinent to the planned operations.
 - 2. The use of helium or other inert gases, and the use of multiple decompression gases.
 - 3. Equipment configurations
 - 4. Mixed gas decompression planning
 - 5. Gas management planning
 - 6. Thermal considerations
 - 7. END determination
 - 8. Mission planning and logistics
 - 9. Emergency procedures
 - 10. Mixed gas production methods
 - 11. Methods of gas handling and cylinder filling
 - 12. Oxygen exposure management
 - 13. Gas analysis
 - 14. Mixed gas physics and physiology
- c) Practical Training:
 - 1. Confined water session(s) in which divers demonstrate proficiency in required skills and techniques for proposed diving operations.
 - 2. A minimum of 6 open water training dives.
 - 3. At least one initial dive shall be in 130 feet or less to practice equipment handling and emergency procedures.
 - 4. Subsequent dives will gradually increase in depth, with a majority of the training dives being conducted between 130 feet and the planned operational depth.
 - 5. Planned operational depth for initial training dives shall not exceed 260 feet.
 - 6. Diving operations beyond 260 feet requires additional training dives.

10.20 Equipment and Gas Quality Requirements

- a) Equipment requirements shall be developed and approved by the DCB, and met by divers, prior to engaging in mixed-gas diving. Equipment shall meet other pertinent

- requirements set forth elsewhere in this standard.
- b) The quality of inert gases used to produce breathing mixtures shall be of an acceptable grade for human consumption.

10.30 Minimum Operational Requirements

- a) Approval of dive plan applications to conduct mixed gas dives shall be on a case-by-case basis.
- b) All applicable operational requirements for Nitrox and decompression diving shall be met.
- c) The maximum pO_2 to be used for planning required decompression dives is 1.6. It is recommended that a pO_2 of less than 1.6 be used during bottom exposure.
- d) Maximum planned Oxygen Toxicity Units (OTU) will be considered based on mission duration.
- e) Divers decompressing on high-oxygen concentration mixtures shall closely monitor one another for signs of acute oxygen toxicity.

If a period of more than 6 months has elapsed since the last mixed gas dive, a series of progressive workup dives to return the diver(s) to proficiency status prior to the start of project diving operations are recommended.

SECTION 11.00 OTHER DIVING TECHNOLOGY

Certain types of diving, some of which are listed below, require equipment or procedures that require training. Supplementary guidelines for these technologies are in development by the AAUS.

LUMCON's Diving Control Board has adopted AAUS guidelines for specialized equipment or environments where applicable. Should the need arise, LUMCON's Diving Control Board will develop guidelines for specialized equipment or environments. Divers shall comply with all SCUBA diving procedures in this standard unless specified.

11.10 Blue Water Diving

Blue water diving is defined as diving in open water where the bottom is generally greater than 200 feet deep. It requires special training and the use of multiple-tethered diving techniques. Specific guidelines that should be followed are outlined in "Blue Water Diving Guidelines" (California Sea Grant Publ. No. T-CSGCP-014).

11.20 Ice and Polar Diving

Divers planning to dive under ice or in polar conditions should use the following: "Guidelines for Conduct of Research Diving", National Science Foundation, Division of Polar Programs, 1990.

11.30 Overhead Environments

Where an enclosed or confined space is not large enough for two divers, a diver shall be stationed at the underwater point of entry and an orientation line shall be used.

11.40 Saturation Diving

If using open circuit compressed air SCUBA in saturation diving operations, divers shall comply with LUMCON's saturation diving guidelines.

11.50 Hookah

Divers using the hookah mode shall be equipped with a diver-carried independent reserve breathing gas supply.

Each hookah diver shall be hose-tended by a separate dive team member while in the water.

The hookah breathing gas supply shall be sufficient to support all hookah divers in the water for the duration of the planned dive, including decompression.

11.60 Surface Supplied Diving

Surface supplied divers shall comply with all SCUBA diving procedures in this standard (Section 2.30). Surface supplied diving shall not be conducted at depths greater than 190 feet.

Divers using the surface supplied mode shall be equipped with a diver-carried independent reserve breathing gas supply.

Each surface supplied diver shall be hose tended by a separate dive team member while in the water.

Divers using the surface supplied mode shall maintain voice communication with the surface tender.

The surface supplied breathing gas supply shall be sufficient to support all surface supplied divers in the water for the duration of the planned dive, including decompression.

During surface supplied diving operations when only one diver is in the water, there must be a standby diver in attendance at the dive location.

11.70 Closed and Semi-Closed Circuit SCUBA (Rebreathers)

Oxygen partial pressure in the breathing gas shall not exceed values approved by the LUMCON's DCB. The generally accepted maximum value is 1.5 atmospheres pO_2 at depths greater than 25 feet.

Chemicals used for the absorption of carbon dioxide shall be kept in a cool, dry location in a sealed container until required for use.

The designated person-in-charge shall determine that the carbon dioxide absorption canister is used in accordance with the manufacturer's instructions.

Closed and semi-closed diving equipment will not be used at a depth greater than that recommended by the manufacturer of the equipment.

SECTION 12.00 REBREATHERS

Verbatim from the AAUS Standards. The LUMCON DSO is not qualified to certify individuals for the use of rebreathers. Certification for rebreathers must be acquired elsewhere.

This section defines specific considerations regarding the following issues for the use of rebreathers:

- Training and/or experience verification requirements for authorization
- Equipment requirements
- Operational requirements and additional safety protocols to be used

Application of this standard is in addition to pertinent requirements of all other sections of the AAUS Standards for Scientific Diving, Volumes 1 and 2.

For rebreather dives that also involve staged decompression and/or mixed gas diving, all requirements for each of the relevant diving modes shall be met. Diving Control Board reserves the authority to review each application of all specialized diving modes, and include any further requirements deemed necessary beyond those listed here on a case-by-case basis.

No diver shall conduct planned operations using rebreathers without prior review and approval of the DCB.

In all cases, trainers shall be qualified for the type of instruction to be provided. Training shall be conducted by agencies or instructors approved by DSO and DCB.

12.10 Definitions and General Information

- a) Rebreathers are defined as any device that recycles some or all of the exhaled gas in the breathing loop and returns it to the diver. Rebreathers maintain levels of oxygen and carbon dioxide that support life by metered injection of oxygen and chemical removal of carbon dioxide. These characteristics fundamentally distinguish rebreathers from open-circuit life support systems, in that the breathing gas composition is dynamic rather than fixed.
 - 1 Advantages of rebreathers may include increased gas utilization efficiencies that are often independent of depth, extended no-decompression bottom times and greater decompression efficiency, and reduction or elimination of exhaust bubbles that may disturb aquatic life or sensitive environments.
 - 2 Disadvantages of rebreathers include high cost and, in some cases, a high degree of system complexity and reliance on instrumentation for gas composition control and monitoring, which may fail. The diver is more likely to experience hazardous levels of hypoxia, hyperoxia, or hypercapnia, due to user error or equipment malfunction, conditions which may lead to underwater blackout and drowning. Inadvertent flooding of the breathing loop and wetting of the carbon dioxide absorbent may expose the diver to ingestion of an alkaline slurry (“caustic cocktail”).
 - 3 An increased level of discipline and attention to rebreather system status by the

diver is required for safe operation, with a greater need for self-reliance.

Rebreather system design and operation varies significantly between make and model. For these reasons when evaluating any dive plan incorporating rebreathers, risk-management emphasis should be placed on the individual qualifications of the diver on the specific rebreather make and model to be used, in addition to specific equipment requirements and associated operational protocols.

- b) Oxygen Rebreathers. Oxygen rebreathers recycle breathing gas, consisting of pure oxygen, replenishing the oxygen metabolized by the diver. Oxygen rebreathers are generally the least complicated design, but are normally limited to a maximum operation depth of 20fsw due to the risk of unsafe hyperoxic exposure.
- c) Semi-Closed Circuit Rebreathers. Semi-closed circuit rebreathers (SCR) recycle the majority of exhaled breathing gas, venting a portion into the water and replenishing it with a constant or variable amount of a single oxygen-enriched gas mixture. Gas addition and venting is balanced against diver metabolism to maintain safe oxygen levels by means which differ between SCR models, but the mechanism usually provides a semi-constant fraction of oxygen (FO_2) in the breathing loop at all depths, similar to open-circuit SCUBA.
- d) Closed-Circuit Mixed Gas Rebreathers. Closed-circuit mixed gas rebreathers (CCR) recycle all of the exhaled gas and replace metabolized oxygen via an electronically controlled valve, governed by electronic oxygen sensors. Manual oxygen addition is available as a diver override, in case of electronic system failure. A separate inert gas source (diluent), usually containing primarily air, heliox, or trimix, is used to maintain oxygen levels at safe levels when diving below 20fsw. CCR systems operate to maintain a constant oxygen partial pressure (PPO_2) during the dive, regardless of depth.

12.20 Prerequisites

Specific training requirements for use of each rebreather model shall be defined by DCB on a case-by-case basis. Training shall include factory-recommended requirements, but may exceed this to prepare for the type of mission intended (e.g., staged decompression or heliox/trimix CCR diving).

Training Prerequisites

- a) Active scientific diver status, with depth qualification sufficient for the type, make, and model of rebreather, and planned application.
- b) Completion of a minimum of 50 open-water dives on SCUBA.
- c) For SCR or CCR, a minimum 100-fsw-depth qualification is generally recommended, to ensure the diver is sufficiently conversant with the complications of deeper diving. If the sole expected application for use of rebreathers is shallower than this, a lesser depth qualification may be allowed with the approval of the DCB.
- d) Nitrox training. Training in use of nitrox mixtures containing 25% to 40% oxygen is required. Training in use of mixtures containing 40% to 100% oxygen may be required, as needed for the planned application and rebreather system. Training may be provided as part of rebreather training.

Training

Successful completion of the following training program qualifies the diver for rebreather diving using the system on which the diver was trained, in depths of 130fsw and shallower, for dives that do not require decompression stops, using nitrogen/oxygen breathing media.

- a) Satisfactory completion of a rebreather training program authorized or recommended by the manufacturer of the rebreather to be used, or other training approved by the DCB. Successful completion of training does not in itself authorize the diver to use rebreathers. The diver must demonstrate to the DCB or its designee that the diver possesses the proper attitude, judgment, and discipline to safely conduct rebreather diving in the context of planned operations.
- b) Classroom training shall include:
 - 1 A review of those topics of diving physics and physiology, decompression management, and dive planning included in prior scientific diver, nitrox, staged decompression and/or mixed gas training, as they pertain to the safe operation of the selected rebreather system and planned diving application.
 - 2 In particular, causes, signs and symptoms, first aid, treatment and prevention of the following must be covered:
 - Hyperoxia (CNS and Pulmonary Oxygen Toxicity)
 - Middle Ear Oxygen Absorption Syndrome (oxygen ear)
 - Hyperoxia-induced myopia
 - Hypoxia
 - Hypercapnia
 - Inert gas narcosis
 - Decompression sickness
 3. Rebreather-specific information required for the safe and effective operation of the system to be used, including:
 - System design and operation, including:
 - Counterlung(s)
 - CO₂ scrubber
 - CO₂ absorbent material types, activity characteristics, storage, handling and disposal
 - Oxygen control system design, automatic and manual
 - Diluent control system, automatic and manual (if any)
 - Pre-dive set-up and testing
 - Post-dive break-down and maintenance
 - Oxygen exposure management
 - Decompression management and applicable decompression tracking methods
 - Dive operations planning
 - Problem recognition and management, including system failures leading to hypoxia, hyperoxia, hypercapnia, flooded loop, and caustic cocktail
 - Emergency protocols and bailout procedures

Practical Training (with model of rebreather to be used) a) A minimum number of hours of underwater time.

Type	Pool/Confined Water	O/W Training	O/W Supervised
Oxygen Rebreather	1 dive, 90 min	4 dives, 120 min.*	2 dives, 60 min
Semi-Closed Circuit	1 dive, 90-120 min	4 dives, 120 min.**	4 dives, 120 min
Closed-Circuit	1 dive, 90-120 min	8 dives, 380 min.***	4 dives, 240 min
* Dives should not exceed 20 fsw. ** First two dives should not exceed 60 fsw. Subsequent dives should be at progressively greater depths, with at least one dive in the 80 to 100 fsw range. *** Total underwater time (pool and open water) of approximately 500 minutes. First two open water dives should not exceed 60 fsw. Subsequent dives should be at progressively greater depths, with at least 2 dives in the 100 to 130 fsw range.			

- b) Amount of required in-water time should increase proportionally to the complexity of rebreather system used.
- c) Training shall be in accordance with the manufacturer's recommendations.

Practical Evaluations

Upon completion of practical training, the diver must demonstrate to the DCB or its designee proficiency in pre-dive, dive, and post-dive operational procedures for the particular model of rebreather to be used. Skills shall include, at a minimum:

- Oxygen control system calibration and operation checks
- Carbon dioxide absorbent canister packing
- Supply gas cylinder analysis and pressure check
- Test of one-way valves
- System assembly and breathing loop leak testing
- Pre-dive breathing to test system operation
- In-water leak checks
- Buoyancy control during descent, bottom operations, and ascent
- System monitoring and control during descent, bottom operations, and ascent
- Proper interpretation and operation of system instrumentation (PO2 displays, dive computers, gas supply pressure gauges, alarms, etc, as applicable)
- Unit removal and replacement on the surface.
- Bailout and emergency procedures for self and buddy, including:
- System malfunction recognition and solution
- Manual system control
- Flooded breathing loop recovery (if possible)
- Absorbent canister failure
- Alternate bailout options
- Symptom recognition and emergency procedures for hyperoxia, hypoxia, and hypercapnia
- Proper system maintenance, including:
- Full breathing loop disassembly and cleaning (mouthpiece, check-valves, hoses, counterlung, absorbent canister, etc.)
- Oxygen sensor replacement (for SCR and CCR)
- Other tasks required by specific rebreather models

Written Evaluation

A written evaluation approved by the DCB with a pre-determined passing score, covering concepts of both classroom and practical training, is required.

Supervised Rebreather Dives

Upon successful completion of open water training dives, the diver is authorized to conduct a series of supervised rebreather dives, during which the diver gains additional experience and proficiency.

- a) Supervisor for these dives should be the DSO or designee, and should be an active scientific diver experienced in diving with the make/model of rebreather being used.
- b) Dives at this level may be targeted to activities associated with the planned science diving application. See the following table for number and cumulative water time for different rebreather types.

Type	Pool/Confined Water	O/W Training	O/W Supervised
Oxygen Rebreather	1 dive, 90 min	4 dives, 120 min.*	2 dives, 60 min
Semi-Closed Circuit	1 dive, 90-120 min	4 dives, 120 min.**	4 dives, 120 min
Closed-Circuit	1 dive, 90-120 min	8 dives, 380 min.***	4 dives, 240 min
* Dives should not exceed 20 fsw. ** First two dives should not exceed 60 fsw. Subsequent dives should be at progressively greater depths, with at least one dive in the 80 to 100 fsw range. *** Total underwater time (pool and open water) of approximately 500 minutes. First two open water dives should not exceed 60 fsw. Subsequent dives should be at progressively greater depths, with at least 2 dives in the 100 to 130 fsw range.			

- c) Maximum ratio of divers per designated dive supervisor is 4:1. The supervisor may dive as part of the planned operations.

Extended Range, Required Decompression and Helium-Based Inert Gas Rebreather dives involving operational depths in excess of 130 fsw, requiring staged decompression, or using diluents containing inert gases other than nitrogen are subject to additional training requirements, as determined by DCB on a case-by-case basis. Prior experience with required decompression and mixed gas diving using open-circuit SCUBA is desirable, but is not sufficient for transfer to dives using rebreathers without additional training.

- a) As a prerequisite for training in staged decompression using rebreathers, the diver shall have logged a minimum of 25 hours of underwater time on the rebreather system to be used, with at least 10 rebreather dives in the 100 fsw to 130 fsw range.
- b) As a prerequisite for training for use of rebreathers with gas mixtures containing inert gas other than nitrogen, the diver shall have logged a minimum of 50 hours of underwater time on the rebreather system to be used and shall have completed training in stage decompression methods using rebreathers. The diver shall have completed at least 12 dives requiring staged decompression on the rebreather model to be used, with at least 4 dives near 130 fsw.
- c) Training shall be in accordance with standards for required-decompression and mixed gas diving, as applicable to rebreather systems, starting at the 130 fsw level.

Maintenance of Proficiency

- a) To maintain authorization to dive with rebreathers, an authorized diver shall make at least one dive using a rebreather every 8 weeks. For divers authorized for the conduct of extended range, stage decompression or mixed-gas diving, at least one dive per

- month should be made to a depth near 130 fsw, practicing decompression protocols.
- b) For a diver in arrears, the DCB shall approve a program of remedial knowledge and skill tune-up training and a course of dives required to return the diver to full authorization. The extent of this program should be directly related to the complexity of the planned rebreather diving operations.

12.30 Equipment Requirements

General Requirements

- a) Only those models of rebreathers specifically approved by DCB shall be used.
- b) Rebreathers should be manufactured according to acceptable Quality Control/Quality Assurance protocols, as evidenced by compliance with the essential elements of ISO 9004. Manufacturers should be able to provide to the DCB supporting documentation to this effect.
- c) Unit performance specifications should be within acceptable levels as defined by standards of a recognized authority (CE, US Navy, Royal Navy, NOAA, etc...).
- d) Prior to approval, the manufacturer should supply the DCB with supporting documentation detailing the methods of specification determination by a recognized third-party testing agency, including unmanned and manned testing. Test data should be from a recognized, independent test facility.
- e) The following documentation for each rebreather model to be used should be available as a set of manufacturer's specifications. These should include:
 - Operational depth range
 - Operational temperature range
 - Breathing gas mixtures that may be used
 - Maximum exercise level which can be supported as a function of breathing gas and depth
 - Breathing gas supply durations as a function of exercise level and depth
 - CO₂ absorbent durations, as a function of depth, exercise level, breathing gas, and water temperature
 - Method, range and precision of inspired PPO₂ control, as a function of depth, exercise level, breathing gas, and temperature
 - Likely failure modes and backup or redundant systems designed to protect the diver if such failures occur
 - Accuracy and precision of all readouts and sensors
 - Battery duration as a function of depth and temperature
 - Mean time between failures of each subsystem and method of determination
- f) A complete instruction manual is required, fully describing the operation of all rebreather components and subsystems as well as maintenance procedures.
- g) A maintenance log is required. The unit maintenance shall be up-to-date based upon manufacturer's recommendations.

Minimum Equipment

- a) A surface/dive valve in the mouthpiece assembly, allowing sealing of the breathing loop from the external environment when not in use.

- b) An automatic gas addition valve, so that manual volumetric compensation during descent is unnecessary.
- c) Manual gas addition valves, so that manual volumetric compensation during descent and manual oxygen addition at all times during the dive are possible.
- d) The diver shall carry alternate life support capability (open-circuit bail-out or redundant rebreather) sufficient to allow the solution of minor problems and allow reliable access to a pre-planned alternate life support system.

Oxygen Rebreathers Oxygen rebreathers shall be equipped with manual and automatic gas addition valves.

Semi-Closed Circuit Rebreathers. SCRs shall be equipped with at least one manufacturer-approved oxygen sensor sufficient to warn the diver of impending hypoxia. Sensor redundancy is desirable, but not required.

Closed Circuit Mixed-gas Rebreathers.

- a) CCR shall incorporate a minimum of three independent oxygen sensors.
- b) A minimum of two independent displays of oxygen sensor readings shall be available to the diver.
- c) Two independent power supplies in the rebreather design are desirable. If only one is present, a secondary system to monitor oxygen levels without power from the primary battery must be incorporated.
- d) CCR shall be equipped with manual diluent and oxygen addition valves, to enable the diver to maintain safe oxygen levels in the event of failure of the primary power supply or automatic gas addition systems.
- e) Redundancies in onboard electronics, power supplies, and life support systems are highly desirable.

12.40 Operational Requirements

General Requirements

- a) All dives involving rebreathers must comply with applicable operational requirements for open-circuit SCUBA dives to equivalent depths.
- b) No rebreather system should be used in situations beyond the manufacturer's stated design limits (dive depth, duration, water temperature, etc).
- c) Modifications to rebreather systems shall be in compliance with manufacturer's recommendations.
- d) Rebreather maintenance is to be in compliance with manufacturer's recommendations including sanitizing, replacement of consumables (sensors, CO₂ absorbent, gas, batteries, etc) and periodic maintenance.
- e) Dive Plan. In addition to standard dive plan components stipulated in AAUS Section 2.0, all dive plans that include the use of rebreathers must include, at minimum, the following details:
 - Information about the specific rebreather model to be used
 - Make, model, and type of rebreather system
 - Type of CO₂ absorbent material
 - Composition and volume(s) of supply gases

- Complete description of alternate bailout procedures to be employed, including manual rebreather operation and open-circuit procedures

Other specific details:

DCB Buddy Qualifications.

- a) A diver whose buddy is diving with a rebreather shall be trained in basic rebreather operation, hazard identification, and assist/rescue procedures for a rebreather diver.
- b) If the buddy of a rebreather diver is using open-circuit scuba, the rebreather diver must be equipped with a means to provide the open-circuit scuba diver with a sufficient supply of open-circuit breathing gas to allow both divers to return safely to the surface.

Oxygen Exposures

- a) Planned oxygen partial pressure in the breathing gas shall not exceed 1.4 atmospheres at depths greater than 30 feet.
- b) Planned oxygen partial pressure set point for CCR shall not exceed 1.4 atm. Set point at depth should be reduced to manage oxygen toxicity according to the NOAA Oxygen Exposure Limits.
- c) Oxygen exposures should not exceed the NOAA oxygen single and daily exposure limits. Both CNS and pulmonary (whole-body) oxygen exposure indices should be tracked for each diver.

Decompression Management

- a) DCB shall review and approve the method of decompression management selected for a given diving application and project.
- b) Decompression management can be safely achieved by a variety of methods, depending on the type and model of rebreather to be used. Following is a general list of methods for different rebreather types:
 1. Oxygen rebreathers: Not applicable.
 2. SCR (presumed constant FO₂):
 - Use of any method approved for open-circuit scuba diving breathing air, above the maximum operational depth of the supply gas.
 - Use of open-circuit nitrox dive tables based upon expected inspired FO₂. In this case, contingency air dive tables may be necessary for active-addition SCRs in the event that exertion level is higher than expected.
 - Equivalent air depth correction to open-circuit air dive tables, based upon expected inspired FO₂ for planned exertion level, gas supply rate, and gas composition. In this case, contingency air dive tables may be necessary for active-addition SCRs in the event that exertion level is higher than expected.
 3. CCR (constant PPO₂):
 - Integrated constant PPO₂ dive computer.
 - Non-integrated constant PPO₂ dive computer.
 - Constant PPO₂ dive tables.
 - Open-circuit (constant FO₂) nitrox dive computer, set to inspired FO₂ predicted using PPO₂ set point at the maximum planned dive depth.

- Equivalent air depth (EAD) correction to standard open-circuit air dive tables, based on the inspired FO₂ predicted using the PPO₂ set point at the maximum planned dive depth.
- Air dive computer, or air dive tables used above the maximum operating depth (MOD) of air for the PPO₂ setpoint selected.

Maintenance Logs, CO₂ Scrubber Logs, Battery Logs, and Pre-And Post-Dive Checklists

Logs and checklists will be developed for the rebreather used, and will be used before and after every dive. Diver shall indicate by initialing that checklists have been completed before and after each dive. Such documents shall be filed and maintained as permanent project records. No rebreather shall be dived which has failed any portion of the pre-dive check, or is found to not be operating in accordance with manufacturer's specifications.

Pre-dive checks shall include:

- Gas supply cylinders full
- Composition of all supply and bail-out gases analyzed and documented
- Oxygen sensors calibrated
- Carbon dioxide canister properly packed
- Remaining duration of canister life verified
- Breathing loop assembled
- Positive and negative pressure leak checks
- Automatic volume addition system working
- Automatic oxygen addition systems working
- Pre-breathe system for 3 minutes (5 minutes in cold water) to ensure proper oxygen addition and carbon dioxide removal (be alert for signs of hypoxia or hypercapnia)
- Other procedures specific to the model of rebreather used
- Documentation of ALL components assembled
- Complete pre-dive system check performed
- Final operational verification immediately before to entering the water:
- PO₂ in the rebreather is not hypoxic
- Oxygen addition system is functioning;
- Volumetric addition is functioning
- Bail-out life support is functioning

Alternate Life Support System

The diver shall have reliable access to an alternate life support system designed to safely return the diver to the surface at normal ascent rates, including any required decompression in the event of primary rebreather failure. The complexity and extent of such systems are directly related to the depth/time profiles of the mission. Examples of such systems include, but are not limited to:

- Open-circuit bailout cylinders or sets of cylinders, either carried or pre-positioned
- Redundant rebreather
- Pre-positioned life support equipment with topside support

CO₂ Absorbent Material

- a) CO₂ absorption canister shall be filled in accordance with the manufacturer's specifications.
- b) CO₂ absorbent material shall be used in accordance with the manufacturer's specifications for expected duration.
- c) If CO₂ absorbent canister is not exhausted and storage between dives is planned, the canister should be removed from the unit and stored sealed and protected from ambient air, to ensure the absorbent retains its activity for subsequent dives.
- d) Long-term storage of carbon dioxide absorbents shall be in a cool, dry location in a sealed container. Field storage must be adequate to maintain viability of material until use.

Consumables (e.g., batteries, oxygen sensors, etc.)

Other consumables (e.g., batteries, oxygen sensors, etc.) shall be maintained, tested, and replaced in accordance with the manufacturer's specifications.

Unit Disinfections

The entire breathing loop, including mouthpiece, hoses, counterlungs, and CO₂ canister, should be disinfected periodically according to manufacturer's specifications. The loop must be disinfected between each use of the same rebreather by different divers.

12.50 Oxygen Rebreathers

- a) Oxygen rebreathers shall not be used at depths greater than 20 feet.
- b) Breathing loop and diver's lungs must be adequately flushed with pure oxygen prior to entering the water on each dive. Once done, the diver must breathe continuously and solely from the intact loop, or re-flushing is required.
- c) Breathing loop shall be flushed with fresh oxygen prior to ascending to avoid hypoxia due to inert gas in the loop.

12.60 Semi-Closed Circuit Rebreathers

- a) The composition of the injection gas supply of a semi-closed rebreather shall be chosen such that the partial pressure of oxygen in the breathing loop will not drop below 0.2 atm, even at maximum exertion at the surface.
- b) The gas addition rate of active addition SCR (e.g., Draeger Dolphin and similar units) shall be checked before every dive, to ensure it is balanced against expected workload and supply gas FO₂.
- c) The intermediate pressure of supply gas delivery in active-addition SCR shall be checked periodically, in compliance with manufacturer's recommendations.
- d) Maximum operating depth shall be based upon the FO₂ in the active supply cylinder.
- e) Prior to ascent to the surface the diver shall flush the breathing loop with fresh gas or switch to an open-circuit system to avoid hypoxia. The flush should be at a depth of approximately 30 fsw during ascent on dives deeper than 30 fsw, and at bottom depth on dives 30 fsw and shallower.

12.70 Closed-Circuit Rebreathers

- a) The FO_2 of each diluent gas supply used shall be chosen so that, if breathed directly while in the depth range for which its use is intended, it will produce an inspired PPO_2 greater than 0.20 atm but no greater than 1.4 atm.
- b) Maximum operating depth shall be based on the FO_2 of the diluent in use during each phase of the dive, so as not to exceed a PO_2 limit of 1.4 atm.
- c) Divers shall monitor both primary and secondary oxygen display systems at regular intervals throughout the dive, to verify that readings are within limits, that redundant displays are providing similar values, and whether readings are dynamic or static (as an indicator of sensor failure).
- d) The PPO_2 set point shall not be lower than 0.4 atm or higher than 1.4 atm.

SECTION 13.00 SCIENTIFIC CAVE AND CAVERN DIVING STANDARD

This standard helps to ensure all scientific diving in overhead environments is conducted in a manner which will maximize the protection of scientific divers from accidental injury and/or illness and provide the basis allowing the working reciprocity between AAUS organizational members.

If a conflict exists between this standard and other standards in this manual, the information set forth in this standard only takes precedence when the scientific diving being conducted takes place wholly or partly within an underwater cave or cavern environment.

A dive team shall be considered to be cave or cavern diving if at any time during the dive they find themselves in a position where they cannot complete a direct, unobstructed ascent to the surface because of rock formations.

Requirements for this aspect are verbatim from the AAUS, Standards for Scientific Diving, Section 13.00

The LUMCON Diving Safety Program **does not** provide certification for divers engaged in cave and cavern diving, but will review certifications provided from qualified individuals and deem if the diver(s) are appropriately skilled to be allowed to dive under the LUMCON AAUS membership.

The member organization requires that no person shall engage in scientific cave or cavern diving unless that person holds a recognized certificate/authorization issued pursuant to the provisions of this manual.

The diver must demonstrate to the DCB or its designee that the diver possesses the proper attitude, judgment, and discipline to safely conduct cave and cavern diving in the context of planned operations.

Operational requirements for cave and cavern diving have been established through accident analysis of previous cave diving accidents.

13.1 Definitions

Alternate Gas Supply - Fully redundant system capable of providing a gas source to the diver should their primary gas supply fail.

Bubble Check - Visual examination by the dive team of their diving systems, looking for o-ring leaks or other air leaks conducted in the water prior to entering a cave; usually included in the "S" Drill.

Cave – A dive shall be considered a cave dive if any one or more of the environmental limits specified in the definition of cavern are exceeded or otherwise not followed. Linear penetrations limits shall not exceed the limits of each diver's training.

Cave Dive -A dive, which takes place partially or wholly underground, in which one or more of the environmental parameters defining a cavern dive are exceeded.

Cavern -An entrance and first chamber to a cave where:

- a) light from the entrance is visible to all dive team members at all times during the dive.
- b) Members of the dive team do not pass through any restrictions that do not allow the divers to swim side by side during the dive, nor are there any restrictions between the divers and the most expeditious exit to the surface.
- c) Maximum depth achieved shall not exceed the depth ratings of dive team.

Cavern Dive -A dive which takes place partially or wholly underground, in which the following environmental parameters are met:

- a) Natural sunlight is continuously visible from the entrance.
- b) Environmental conditions will be evaluated by the DSO or designee and appropriate limits incorporated into the dive plan.

Dual Valve Manifold with Isolator Valve -A manifold joining two diving cylinders, that allows the use of two completely independent regulators. If either regulator fails, it may be shut off, allowing the remaining regulator access to the gas in both of the diving cylinders.

Gas Management -Gas planning rule which is used in cave diving environments in which the diver reserves a portion of their available breathing gas for anticipated emergencies (See Rule of Thirds, Sixths).

Guideline - Continuous line used as a navigational reference during a dive leading from the team position to a point where a direct vertical ascent may be made to the surface.

Jump/Gap Reel -Spool or reel used to connect one guide line to another thus ensuring a continuous line to the exit.

Knife/Line Cutter - Small, sharp blade capable of easily cutting a guideline and that is accessible to the diver.

Lava Tube -Type of cave or cavern formed by the surface hardening of a stream of flowing molten rock, which may later become flooded due to static sea level changes.

Line Marker -Any one of several types of markers attached to a guideline, which provides additional navigational information to the dive team, most commonly the direction out to the nearest surface.

Mine Diving -Diving in the flooded portions of a man-made mine. Necessitates use of techniques detailed for cave diving.

Penetration Distance -Linear distance from the entrance intended or reached by a dive team

during a dive at a dive site.

Primary Reel - Initial guideline used by the dive team from open water to maximum penetration or a permanently installed guideline.

Restriction- Any passage through which two divers cannot easily pass side by side while sharing air.

Rule of Thirds - Gas planning rule which is used in cave diving environments in which the diver reserves two-thirds of their breathing gas supply for exiting the cave or cavern.

Rule of Sixths - Air planning rule which is used in cave or other confined diving environments in which the diver reserves five-sixths of their breathing gas supply (for DPV use, siphon diving, etc.) for exiting the cave or cavern.

Safety Drill - ("S" Drill) - Short gas sharing, equipment evaluation, dive plan, and communication exercise carried out prior to entering a cave or cavern dive by the dive team.

Safety Reel - Secondary reel used as a backup to the primary reel, usually containing 150 feet of guideline that is used in an emergency.

Scientific Cave or Cavern Diver In Training -Authorized to dive in the cave or cavern environment under the direct supervision of qualified instructional personnel for training purposes only.

Scientific Cavern Diver -Authorization to dive in an overhead environment as defined in cavern.

Scientific Cave Diver - Authorization to dive in an overhead environment as defined in cave.

Sidemount Diving - A diving mode utilizing two independent SCUBA systems carried along the sides of the diver's body; either of which always has sufficient air to allow the diver to reach the surface unassisted.

Siphon - Cave into which water flows with a generally continuous in-current.

Solution Cave - Cave formed in carbonate or carbonate-cemented bedrock, formed by the dissolution of the rock by groundwater.

Spring - Cave with water flowing with a generally continuous outflow.

Sump - An area in a dry cave that can no longer be negotiated without the use of diving equipment.

Well - A vertical or nearly vertical shaft, usually manmade, through which a diver can access a dive site.

13.2 Cave and Cavern Environment Hazards

Current/Flow -Underwater caves have currents that vary in strength and direction. Of particular note is a condition known as siphoning. Siphoning caves have flow or current directed into the cave. This can cause poor visibility as a result of mud and silt being drawn into the cave entrance.

Silt -The presences of silt, sand, mud, clay, etc. on the cave floor can cause visibility to be reduced to nothing in a very short time.

Restrictions -Any passage through which two divers cannot easily pass side by side while sharing air make air sharing difficult.

Cave-ins -Cave-ins are a normal part of cave evolution; however experiencing a cave-in during diving operations is extremely unlikely.

13.3 Minimum Experience and Training Requirements

a) Cavern Diver

1. Prerequisites

The applicant for training shall have met the requirements in Section 5.00 of the *AAUS Standards for Scientific Diving Certification and Operation of Scientific Diving Programs*, fourth edition (2003), and hold as a minimum a scientific dive r permit.

2. Cavern Training

The applicant is to participate in the following areas of training, or their equivalent:

- Classroom Lecture and Critique—The applicant shall participate in classroom discussion or equivalent type activities covering these topics: Policy for cavern diving, cavern environment and environmental hazards, accident analysis, psychological considerations, equipment, body control, communications, cavern diving techniques, navigation and guidelines, dive planning, cave geology, cave hydrology, cave biology, and emergency procedures.
- Land Drills—The applicant shall participate in drills above water using the guideline and reel. Drills are to emphasize proper use of the reel, techniques and considerations for laying a guideline, guideline following, buddy communication, and emergency procedures.
- Cavern Dives—A minimum of four (4) cavern dives, preferably to be conducted in a minimum of two (2) different caverns. Skills the applicant should demonstrate include: Safety drill (S-drill), gear matching, bubble check prior to entering the cavern on each dive, proper buoyancy compensator use, proper trim and body positioning, hovering and buoyancy with hand tasks, specialized propulsion techniques (modified flutter kick, modified frog kick, pull and glide, ceiling walk or shuffle), proper guideline and reel use, ability to follow the guideline with no visibility, sharing air while following a

guideline, and sharing air while following the guideline with no visibility light and hand signal use, and ability to comfortably work in a cavern without assistance.

- Written Examination - A written evaluation approved by the DCB with a predetermined passing score, covering concepts of both classroom and practical training is required.

b) Cave Diver

1. Prerequisites

The applicant for training shall hold as a minimum a cavern diver permit.

2. Cave Training

The applicant is to participate in the following areas of training, or their equivalent:

- Classroom Lecture and Critique—The applicant shall participate in classroom discussion or equivalent type activities covering these topics: Review of the topics listed in cavern diver training and differing techniques and procedures used in cave diving, additional equipment procedures used in cave diving, cave diving equipment configurations, procedures for conducting diving operations involving complex navigation and use of line markers, advanced gas management and a thorough review of dive tables, decompression tables, and decompression theory.
- Land Drills—The applicant shall participate in drills above water included in cavern training. Drills are to emphasize proper use of the reel in lost diver procedures, as well as line placements and station location as required for surveying.
- Cave Dives—A minimum of twelve (12) cave dives, to be conducted in a minimum of four (4) different cave sites with differing conditions recommended. Skills the applicant should demonstrate include: Review of skills listed in cavern training, and special techniques in buoyancy control, referencing and back-up navigation, air sharing in a minor restriction using a single file method, special propulsion techniques in heavy outflow, anti-silting techniques, line jumping techniques and protocols, surveying, and ability to critique their dives. Emergency procedures training shall include proficiency in lost line, lost diver, gas sharing, light failure, valve manipulation, and no/low visibility situations.
- Written Examination - A written evaluation approved by the DCB with a predetermined passing score, covering concepts of both classroom and practical training is required.

13.4 Equipment Requirements

Equipment used for SCUBA in cave or cavern diving is based on the concept of redundancy. Redundant SCUBA equipment shall be carried whenever the planned penetration distances are such that an emergency swimming ascent is not theoretically possible.

a) Cavern Diving Equipment

The following equipment shall be required, in excess of that detailed for open water SCUBA diving in Volume 1, Section 3.00. Each member of the dive team shall have:

- At minimum, a single tank equipped with an “H” valve or an alternate air supply.
- A BCD capable of being inflated from the tank.
- Slate and pencil.
- Two battery powered secondary lights of an approved type.
- Knife or line cutter.
- One primary reel of at least 350 feet for each team.
- Snorkel—No snorkel shall be worn while inside underwater cave or cavern.

b) Cave Diving Equipment

The following equipment shall be required, in excess of that detailed for cavern diving: Each member of the dive team shall have:

- Cylinders with dual orifice isolation valve manifold or independent SCUBA systems each capable of maintaining enough gas for the diver during exit and ascent to the surface.
- Two completely independent regulators, at least one of each having submersible tank pressure gauge, a five foot or longer second stage hose, low pressure inflator for the BCD.
- A primary light with sufficient burn time for the planned dive.
- Safety reel with at least 150 feet of line.
- Appropriate submersible dive tables and/or dive computer (computers w/ backup tables).
- Line markers.
- Snorkel—No snorkel shall be worn while inside underwater cave or cavern.

13.5 Operational Requirements and Safety Protocols

All members of the dive team must have met the applicable all sections of Volume One and applicable sections of Volume Two of the AAUS manual and be authorized for that type of diving by the DCB before conducting scientific cave dives.

a) Cavern Diver Procedures

- Cavern diving shall not be conducted at depths greater than 100 feet.
- Dive teams shall perform a safety drill prior to each cave or cavern penetration that includes equipment check, gas management, and dive objectives.
- Each team within the cavern zone must utilize a continuous guideline appropriate for the environment leading to a point from which an uninterrupted ascent to the surface may be made.
- Gas management must be appropriate for the planned dive with special considerations made for; DPVs, siphon diving, rebreathers, etc.
- The entire dive team is to immediately terminate the dive whenever any dive team member feels an unsafe condition is present.

b) Cave Diving Procedures

- Dive teams shall perform a safety drill prior to each cave or cavern penetration that includes equipment check, gas management, and dive objectives.

- Diver teams must run or follow a continuous guideline from the surface pool to maximum penetration.
- Gas management must be appropriate for the planned dive with special considerations made for: DPVs, siphon diving, rebreathers, etc.
- Each diver must carry one primary and two back up lights.
- Divers utilizing side mount diving or other dual independent diving systems must have the approval of the Diving Safety Officer or his/her designee.
- The entire dive team is to immediately terminate the dive whenever any dive team member feels an unsafe condition is present.

Volume 3

Sections 14.00 through 19.00

LUMCON Specific Diving Activities

SECTION 14.00 USE OF SCUBA IN LUMCON DIVING ACTIVITIES

The standards set forth in this manual apply to all LUMCON employees, all non-employee volunteers, all staff at member universities, i.e., anyone that has been AAUS certified as a Diver-in-Training or AAUS Scientific Diver. These standards also apply to anyone diving from LUMCON vessels and anyone participating in a LUMCON-sponsored or -sanctioned diving activity.

14.10 Faculty, students, and staff at member universities

Scientific diving requires standards for the protection of divers from the inherent dangers of breathing compressed air at depth in the water, often in less than optimal conditions. In addition the operation of a scientific dive program requires well established lines of communication, authority, standards, and liability. Therefore, it is the opinion of the LUMCON Diving Control Board and the LUMCON Executive Director that member institutions maintain diving safety program on their respective campuses. However, given the small size of some campus dive programs, LUMCON has administered scientific diving for LUMCON member institutions as a courtesy and service to the greater consortium. Other academic and research institutions in the Gulf of Mexico region that can certify divers for AAUS are listed in Appendix N.

Faculty, students, and staff of LUMCON member universities that wish to dive under the authority of the LUMCON Diving Program must meet all the requirements specified in this manual for LUMCON Scientific Diver or Diver-in-Training. In addition, they must obtain written authorization from the respective university administration releasing LUMCON from liability and assuming liability in the event of a diving incident or accident.

All scheduling of check-out dives, swim tests, written tests, etc. will be done at the discretion of the Diving Safety Officer and at the expense of the requesting institution.

14.20 Volunteer divers, non-employee

On occasion it is necessary to enlist the assistance of volunteer divers to assist in diving-intensive research programs of LUMCON faculty members. Solicitation of volunteers to assist in diving-intensive research is to be conducted by individual LUMCON faculty members.

LUMCON faculty members are encouraged to seek AAUS-certified Scientific Divers who have appropriate diving experience for research activities that are diver-intensive. See Appendix P for a list of institutions in the Gulf of Mexico region that have AAUS Diving Programs.

The sponsoring LUMCON faculty member will do a preliminary screening of potential volunteer divers to determine whether the diver might be suitable. The names will be forwarded to the LUMCON DSO so that s/he will know that the faculty member approves of the individual's request to be AAUS certified by LUMCON.

Volunteer divers must be aware of the risks inherent in scientific diving, and must sign a separate waiver of liability. Volunteer divers are not eligible for Workman's Compensation, and should be advised of this restriction.

Volunteers should be experienced divers, familiar with diving conditions where they will be volunteering and all techniques to be involved. Volunteer divers must meet all the requirements set forth in this manual and are subject to the same training and medical standards as for LUMCON Scientific Diver or Diver-in-Training.

All volunteers must be approved to dive by the LUMCON Diving Safety Officer.

14.30 Logistics and costs

Obtaining or maintaining AAUS scientific diver status carries with it associated costs (e.g., pool time, open water check out diver, classes, equipment maintenance). The time of the LUMCON DSO in providing a LUMCON Dive Program is funded as a part-time effort by LUMCON. Excessive time for long-distance classes or long distance dives for open water check out will be borne by the diver or his/her sponsor.

When a LUMCON faculty member or researcher at a member university knows that dive certifications are necessary for upcoming trips, s/he is requested to begin the process well in advance and to coordinate activities among divers and the LUMCON DSO to minimize time spent by the DSO.

It is best to determine the financial commitments prior to beginning the certification process. The costs incurred in the process of certification and maintenance of certification shall be borne by:

1. For LUMCON divers: The LUMCON faculty member sponsoring the dive-related research usually covers employee expenses related to diving, other than a diver's personal gear. These arrangements are to be developed by the faculty member and employee.
2. For divers at member universities: The sponsoring researcher or institution, or the member university employee as agreed upon by the parties.
3. Non-employee volunteers: As agreed upon by the LUMCON faculty member and the volunteer.

Divers needing certification:

- a) May be added to planned LUMCON research dive trips as available by the LUMCON faculty member or other LUMCON researchers. However, potential divers should not depend on this as the mechanism for check out dives or building dives for certification. This is not the usual mechanism for meeting certification.
- b) May arrange and pay for a LUMCON boat to be used by the DSO for the open water certification in the area of LUMCON Center.
- c) May arrange and pay for a private boat, the time of the DSO, and the travel expenses of the DSO for open water certification away from the area of the LUMCON Marine Center.

Divers seeking LUMCON AAUS certification should plan on a reasonable amount of time to complete the certification process, including all medical, classroom, in pool, and check out dive activities.

SECTION 15.00 DIVER RESPONSIBILITIES

Any diver operating under the auspices of the Louisiana Universities Marine Consortium Dive Program must agree to and meet the following responsibilities in addition to those outlined in Sections 1 through 13.

- Maintain good standing with the Diving Safety Program as set forth in this manual (Section 5.50).
- Maintain a current diving physical exam as outlined in Section 6.00, and provide a copy of the required and completed forms to the LUMCON DSO
- Maintain an up-to-date diver profile on the LUMCON Dive Program web site.
- Provide records of all training and classes to the Diving Safety Officer in a prompt fashion.
- Maintain equipment on a yearly basis and provide records of equipment maintenance and repair to the LUMCON DSO.
- Maintain necessary training in first aid, CPR and emergency oxygen care as required and provide records of completion to the LUMCON DSO.
- Maintain complete dive records and provide same to the LUMCON Dive Program web site within 7 days of diving activity.
- File a written dive plan including planned depth, bottom time, and description of activities to the DSO at least 72 hours before any dive activity.
- File necessary Incident Reports (Section 2.70, Appendix M)
- Maintain current medical insurance covering hyperbaric oxygen therapy in a recompression chamber.
- Insurance specifically covering diving accidents and illnesses, preferably Diver's Alert Network (DAN) is required. If you have no policy meeting this requirement you can purchase one from the Diver's Alert Network. You can contact DAN on the web at www.DiversAlertNetwork.org or see the Diving Safety Officer for details of this policy and application forms.

If you are diving as a LUMCON employee, Workman's Compensation will be the mode of medical insurance coverage. However, if you are diving in a non-employment situation some other insurance coverage is necessary. To determine if your present major medical insurance will cover these expenses, inquire to the claims department of your insurance company and be sure to specify "SCUBA diving accidents requiring a recompression chamber."

- Proof of current medical insurance covering recompression therapy is required.

Only AAUS-certified divers who have remained active for four years with LUMCON will be maintained in LUMCON's active diver files. In order to become active again after that time, the diver will need to initiate full AAUS Scientific Diver or Diver-in-Training procedures, as specified in this manual.

SECTION 16.00 DIVING FROM LUMCON VESSELS

16.1 Standard regulations for all vessels

All diving activities from LUMCON vessels must be in accordance with regulations as established by the American Academy of Underwater Sciences, Standards for Scientific Diving, and LUMCON Guidelines for Scientific Diving.

A copy of the approved dive plan should be provided to the boat operator or ship captain prior to leaving the dock.

Procedures to follow in the event of a diving accident (Appendix K), including but not limited to the location and phone number of the nearest chamber, the name and telephone number of your institution's Diving Safety Officer, and divers medical forms (Appendices 1-4) must be given to the Captain before the vessel sails.

Before entering the water, the dive team(s) and the standby diver(s) should be completely aware of and understand the dive plan.

The use of LUMCON compressors or special equipment must be requested from the LUMCON Vessel Operations Department well in advance of diving activities.

16.2 Regulations for diving from the *R/V Pelican*

The Captain has responsibility for all activities aboard the ship. Diving activities can be terminated by the Captain in the event of unfavorable weather conditions, bad currents, other vessel activity in the area, or other circumstances that he/she feels may jeopardize the safety of the individuals involved.

The LUMCON DSO or the Lead Diver also has the authority to disapprove or suspend diving activities that are deemed to be unsafe. The Lead Diver may request that a diver not dive if s/he decides that the diver is unprepared, hesitant, or impaired in some manner.

The Captain or watch officer must be informed before divers enter the water.

A standby boat must be available during all diving activities and must be able to be quickly deployed. The rescue boat normally carried on board the vessel may not be adequate for some diving activities, and an alternative should be procured prior to departure from the dock.

A standby diver must be on the deck and prepared to enter the water when divers are in the water.

It is recommended that the vessel be tied to a structure or anchored before divers enter the water.

All divers must be out of the water before the main engines can be started. “Live boating” or maneuvering the vessel while divers are in the water is forbidden, unless there is an emergency, in the case of equipment recovery, or in extraordinary conditions.

Snorkeling is permitted while the vessel is adrift or tied or anchored. A down line at least 100 ft in length must be available on the vessel and a safety diver must be stationed on the deck while skin divers are in the water.

Small boats may be used for dive operations away from the *Pelican*. A member of the ship’s crew must be on the small boat and a standby diver must be onboard the *Pelican* (or on the small boat if the diving is far from the *Pelican*) during diving activities.

The number of divers permitted to enter the water at one time may be restricted by water depth, weather conditions or other activities or conditions that may interfere with the ability to retrieve divers from the water.

A trailing safety line 50 feet long must be deployed from the primary dive vessel, either ship or small boat.

Emergency oxygen apparatus is required for all diving activities.

16.3 Regulations for diving from the *R/V Acadiana*

Regulations for diving from the *R/V Acadiana* are the same as those for the *R/V Pelican*, with the following exceptions:

- a) A standby boat is not a routine piece of equipment for the *Acadiana*. If requested to be placed on board for diving activities, there are inflatable boats that can be provided. Otherwise, the smaller size of the *Acadiana* and its maneuverability should be sufficient for emergency recovery, if needed.
- b) When a small inflatable boat is required for dive operations from the *Acadiana*, a standby diver should be the driver of the inflatable. There is insufficient room for both a standby diver and a vessel crew member.

16.4 Regulations for diving from LUMCON small boats

Radio contact should be established with LUMCON base, pre-designated contacts upon arrival at the dive location, or a contact made with a radio test for the area, attesting to the presence of a LUMCON small boat with divers.

Emergency oxygen is required for all diving activities, even on small boats. Arrangements for the availability of emergency oxygen should be made well in advance of the planned dive.

A boat tender, who may be a third certified diver and trained in CPR and First Aid (including oxygen administration), must remain on board the vessel while divers are in the water.

All divers must be out of the water before the engines are started, unless the boat is needed to pick up or rescue a diver. “Live boating” or maneuvering the vessel while divers are in the water is forbidden unless there is an emergency, in the case of equipment recovery, or in extraordinary conditions.

A trailing safety line 50 feet long should be deployed from the boat.

SECTION 17.00 DIVING IN THE VICINITY OF PETROLEUM PLATFORMS

Much of the diving related work accomplished at LUMCON requires working in close proximity to oil and gas production platforms. Operation in these environments requires special care.

17.1 Permission to dive or anchor near oil platforms

The Principal Investigator is responsible for securing needed permissions and clearance from platform owner/operators prior to any diving activity.

17.2 Increased boat traffic near oil/gas platforms

Increased boat traffic in the vicinity of platforms is common. Divers should display a dive flag indicating divers in the area. Boat tenders/captains should be aware of any approaching boat traffic, and signal the presence of divers to approaching boat traffic as needed. Divers should take special care to avoid newly arrived vessels when surfacing.

17.3 Overhead obstructions

Working in the vicinity of oil and gas platforms often requires diving beneath structure (legs and other supports) that can block access to the surface. Divers should constantly monitor their surroundings and know the quickest route to the surface. All care should be taken to avoid the possibility of overhead obstruction. When possible a down line should be deployed from the vessel, providing divers with a means to recognize a clear path to the surface.

17.4 Entanglement danger

Lost fishing line and discarded equipment around oil/gas platforms present an added danger of entanglement while diving in these locales. All divers must carry a dive knife capable of cutting a variety of materials likely to be encountered.

SECTION 18.00 COMMERCIAL DIVING FROM LUMCON VESSELS

Construction and trouble-shooting tasks traditionally associated with commercial diving are not considered a scientific dive.

LUMCON scientific divers cannot participate in commercial diving activities unless they are trained as and have current commercial diver status. Likewise, commercial divers are not trained scientific divers, and unless they have current LUMCON standing shall not be permitted to participate in scientific diving activities.

A commercial diver paid by LUMCON or member universities may dive from a LUMCON vessel if s/he

- is a qualified and current commercial diver, and
- meets the OSHA requirements for commercial diver standards as stated in CFR 1910 subpart T <http://www.complianceregs.com/29cfr/1910/1910.html>

A commercial diver must provide a copy of his/her commercial diving card, sign the LUMCON waiver for non-employee liability (Appendix D) and the liability waiver for commercial diving (Appendix F), provide proof of current diver insurance, and submit a dive plan (Appendix J).

SECTION 19.00 RECOMMENDATIONS OF THE LUMCON DIVING CONTROL BOARD

Scientific divers are strongly advised to continue their dive and safety training through advanced level training with a professional dive instructor.

The use of dive computers, especially those that can be downloaded to a desktop computer, is strongly recommended for dive planning and monitoring. For a list of AAUS recommended dive computers, visit <http://www.aaus.org>.

If dive tables are to be used for dive planning and repetitive dive calculations, scientific divers are encouraged to use the YSCUBA tables, or the ones with which the diver was trained or is most familiar (e.g., US Navy, NAUI, PADI, FAUI). If diving with tables, the diver should have a copy on-board.

Appendices

1 through 9

Required for All Organizational Members

APPENDIX 1
DIVING MEDICAL EXAM OVERVIEW FOR THE EXAMINING PHYSICIAN

TO THE EXAMINING PHYSICIAN:

This person, _____, requires a medical examination to assess his/her fitness for certification as a Scientific Diver for the Louisiana Universities Marine Consortium, 8124 Hwy. 56, Chauvin, LA 70344_.

The answers on the Diving Medical History Form (attached) may indicate potential health or safety risks as noted. Your evaluation is requested on the attached SCUBA Diving Fitness Medical Evaluation Report. If you have questions about diving medicine, you may wish to consult one of the references on the attached list or contact one of the physicians with expertise in diving medicine whose names and phone numbers appear on an attached list. Please contact the undersigned Diving Safety Officer if you have any questions or concerns about diving medicine or the Louisiana Universities Marine Consortium standards. Thank you for your assistance.

Diving Safety Officer	Date
Lora Pride	985-851-
2834	Phone Number
Printed Name	

SCUBA and other modes of compressed-gas diving can be strenuous and hazardous. A special risk is present if the middle ear, sinuses, or lung segments do not readily equalize air pressure changes. The most common cause of distress is eustachian insufficiency. Most fatalities involve deficiencies in prudence, judgment, emotional stability, or physical fitness. Please consult the following list of conditions that usually restrict candidates from diving.

(Adapted from Bove, 1998: bracketed numbers are pages in Bove)

CONDITIONS WHICH MAY DISQUALIFY CANDIDATES FROM DIVING

1. Abnormalities of the tympanic membrane, such as perforation, presence of a monomeric membrane, or inability to autoinflate the middle ears. [5 ,7, 8, 9]
2. Vertigo including Meniere’s Disease. [13]
3. Stapedectomy or middle ear reconstructive surgery. [11]
4. Recent ocular surgery. [15, 18, 19]
5. Psychiatric disorders including claustrophobia, suicidal ideation, psychosis, anxiety states, untreated depression. [20 - 23]
6. Substance abuse, including alcohol. [24 - 25]
7. Episodic loss of consciousness. [1, 26, 27]
8. History of seizure. [27, 28]
9. History of stroke or a fixed neurological deficit. [29, 30]
10. Recurring neurological disorders, including transient ischemic attacks. [29, 30]

11. History of intracranial aneurysm, other vascular malformation or intracranial hemorrhage. [31]
12. History of neurological decompression illness with residual deficit. [29, 30]
13. Head injury with sequelae. [26, 27]
14. Hematologic disorders including coagulopathies. [41, 42]
15. Evidence of coronary artery disease or high risk for coronary artery disease². [33 - 35]
16. Atrial septal defects. [39]
17. Significant valvular heart disease - isolated mitral valve prolapse is not disqualifying. [38]
18. Significant cardiac rhythm or conduction abnormalities. [36 - 37]
19. Implanted cardiac pacemakers and cardiac defibrillators (ICD). [39 - 40]
20. Inadequate exercise tolerance. [34]
21. Severe hypertension. [35]
22. History of spontaneous or traumatic pneumothorax. [45]
23. Asthma³. [42 - 44]
24. Chronic pulmonary disease, including radiographic evidence of pulmonary blebs, bullae, or cysts. [45 - 46]
25. Diabetes mellitus. [46 - 47]
26. Pregnancy. [56]

SELECTED REFERENCES IN DIVING MEDICINE

Most of these are available from Best Publishing Company, P.O. Box 30100, Flagstaff, AZ 86003-0100, the Divers Alert Network (DAN) or the Undersea and Hyperbaric Medical Association (UHMS), Bethesda, MD.

- ACC/AHA Guidelines for Exercise Testing. A report of the American College of Cardiology/American Heart Association Task Force on Practice Guidelines (Committee on Exercise Testing). Gibbons RJ, et al. 1997. Journal of the American College of Cardiology. 30:260-311. <http://www.acc.org/clinical/guidelines/exercise/exercise.pdf>
- Alert Diver Magazine; Articles on diving medicine <http://www.diversalertnetwork.org/medical/articles/index.asp>
- “Are Asthmatics Fit to Dive?” Elliott DH, ed. 1996 Undersea and Hyperbaric Medical Society, Kensington, MD.
- “Assessment of Cardiovascular Risk by Use of Multiple-Risk-Factor Assessment Equations.” Grundy et. al. 1999. AHA/ACC Scientific Statement. <http://www.acc.org/clinical/consensus/risk/risk1999.pdf>
- DIVING MEDICINE, Third Edition, 1997. A. Bove and J. Davis. W.B. Saunders Company, Philadelphia

² “Assessment of Cardiovascular Risk by Use of Multiple-Risk-Factor Assessment Equations.” Grundy et. al. 1999. AHA/ACC Scientific Statement.

<http://www.acc.org/clinical/consensus/risk/risk1999.pdf>

³ “Are Asthmatics Fit to Dive?” Elliott DH, ed. 1996 Undersea and Hyperbaric Medical Society, Kensington, MD.

- DIVING AND SUBAQUATIC MEDICINE, Third Edition, 1994. C. Edmonds, C. Lowery and J. Pennefather. Butterworth-Heinemann Ltd. Oxford
- MEDICAL EXAMINATION OF SPORT SCUBA DIVERS, 1998. Alfred Bove, M.D., Ph.D. (ed.). Medical Seminars, Inc. San Antonio, TX
- NOAA DIVING MANUAL, NOAA. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C.
- U.S. NAVY DIVING MANUAL. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C

APPENDIX 2.
MEDICAL EVALUATION OF FITNESS FOR SCUBA DIVING REPORT

Name of Applicant (Print or Type)

Date (Mo/Day/Year)

To The PHYSICIAN:

This person is an applicant for training or is presently certified to engage in diving with self- contained underwater breathing apparatus (SCUBA). This is an activity that puts unusual stress on the individual in several ways. Your opinion on the applicant's medical fitness is requested. SCUBA diving requires heavy exertion. The diver must be free of cardiovascular and respiratory disease. An absolute requirement is the ability of the lungs, middle ear and sinuses to equalize pressure. Any condition that risks the loss of consciousness should disqualify the applicant.

TESTS: Please initial that the following tests were completed.

Initial Examination

- _____ Medical History
- _____ Complete Physical Exam with emphasis on neurological and otological components
- _____ Chest X-Ray
- _____ Spirometry
- _____ Hematocrit or Hemoglobin

Additional testing for first over age 40

- _____ Resting EKG
- _____ Assessment of coronary artery disease using Multiple-Risk-Factor Assessment⁴ (age, lipid profile, blood pressure, diabetic screening, smoker) Note: Exercise stress testing may be indicated based on risk factor assessment⁵

Re-examination

(Every 5 years under age 40, first exam over age 40, every 3 years over age 40, every 2 years over age 60)

- _____ Medical History
- _____ Complete Physical Exam, with emphasis on neurological and otological components
- _____ Hematocrit or Hemoglobin
- _____ Urinalysis
- _____ Any further tests deemed necessary by the physician

Additional testing for over age 40

- _____ Resting EKG
- _____ Assessment of coronary artery disease using Multiple-Risk-Factor Assessment⁵ (age, lipid profile, blood pressure, diabetic screening, smoker) Note: Exercise stress testing may be indicated based on risk factor assessment⁶

PHYSICIAN'S STATEMENT:

_____ 01 Diver **IS** medically qualified to dive for:

- _____ 2 years (over age 60)
- _____ 3 years (age 40-59)
- _____ 5 years (under age 40)

_____ 02 Diver **IS NOT** medically qualified to dive: _____ Permanently _____ Temporarily.

I have evaluated the abovementioned individual according to the American Academy of Underwater Sciences medical standards and required tests for scientific diving (Sec. 6.00 and Appendix 1) and, in my opinion, find no medical conditions that may be disqualifying for participation in scuba diving. I have discussed with the patient any medical condition(s) that would not disqualify him/her from diving but which may seriously compromise

subsequent health. The patient understands the nature of the hazards and the risks involved in diving with these conditions.

Signature MD or DO Date

Name (Print or Type)

Address

Telephone Number E-Mail Address

My familiarity with applicant is: _____ This exam only _____ Regular physician for _____ years

My familiarity with diving medicine is:

AAUS MEDICAL EVALUATION OF FITNESS FOR SCUBA DIVING REPORT
APPLICANT'S RELEASE OF MEDICAL INFORMATION FORM

Name of Applicant (Print or Type) _____

I authorize the release of this information and all medical information subsequently acquired in association with my diving to the _____ Diving Safety Officer and Diving Control Board or their designee at (place) _____ on (date) _____

Signature of Applicant _____

Date _____

REFERENCES

¹ Grundy, S.M., Pasternak, R., Greenland, P., Smith, S., and Fuster, V. 1999. Assessment of Cardiovascular Risk by Use of Multiple-Risk-Factor Assessment Equations. AHA/ACC Scientific Statement. *Journal of the American College of Cardiology*, 34: 1348-1359. <http://content.onlinejacc.org/cgi/content/short/34/4/1348>

APPENDIX 3 DIVING MEDICAL HISTORY FORM
(To Be Completed By Applicant-Diver)

Name _____ Sex ____ Age ____ Wt.____ Ht.____

Sponsor _____ Date ____/____/____
(Dept./Project/Program/School, etc.) (Mo/Day/Yr)

TO THE APPLICANT:

SCUBA diving makes considerable demands on you, both physically and mentally. Diving with certain medical conditions may be asking for trouble not only for yourself, but also to anyone coming to your aid if you get into difficulty in the water. Therefore, it is prudent to meet certain medical and physical requirements before beginning a diving or training program.

Your answers to the questions are as important, in determining your fitness as your physical examination. Obviously, you should give accurate information or the medical screening procedure becomes useless.

This form shall be kept confidential. If you believe any question amounts to invasion of your privacy, you may elect to omit an answer, provided that you shall subsequently discuss that matter with your own physician and they must then indicate, in writing, that you have done so and that no health hazard exists.

Should your answers indicate a condition, which might make diving hazardous, you will be asked to review the matter with your physician. In such instances, their written authorization will be required in order for further consideration to be given to your application. If your physician concludes that diving would involve undue risk for you, remember that they are concerned only with your well-being and safety. Please respect the advice and the intent of this medical history form.

	Have you ever had or do you presently have any of the following?	Yes	No	Comments
1.	Trouble with your ears, including ruptured eardrum, difficulty clearing your ears, or surgery.			
2.	Trouble with dizziness.			
3.	Eye surgery.			
4.	Depression, anxiety, claustrophobia, etc.			
5.	Substance abuse, including alcohol.			
6.	Loss of consciousness.			
7.	Epilepsy or other seizures, convulsions, or fits.			
8.	Stroke or a fixed neurological deficit.			
9.	Recurring neurological disorders, including transient ischemic attacks.			
10.	Aneurysms or bleeding in the brain.			
11.	Decompression sickness or embolism.			
12.	Head injury.			

13.	Disorders of the blood, or easy bleeding.			
14.	Heart disease, diabetes, high cholesterol.			
15.	Anatomical heart abnormalities including patent foramen ovale, valve problems, etc.			
16.	Heart rhythm problems.			
17.	Need for a pacemaker.			
18.	Difficulty with exercise.			
19.	High blood pressure.			
20.	Collapsed lung.			
21.	Asthma.			
22.	Other lung disease.			
23.	Diabetes mellitus.			
24.	Pregnancy.			
25.	Surgery If yes explain below.			
26.	Hospitalizations. If yes explain below.			
27.	Do you take any medications? If yes list below.			
28.	Do you have any allergies to medications, foods, and environmental? If yes explain below.			
29.	Do you smoke?			
30.	Do you drink alcoholic beverages?			
31.	Is there a family history of high cholesterol?			
32.	Is there a family history of heart disease or stroke?			
33.	Is there a family history of diabetes?			
34.	Is there a family history of asthma?			

Please explain any “yes” answers to the above questions.

I certify that the above answers and information represent an accurate and complete description of my medical history.

Signature Date

APPENDIX 4 RECOMMENDED PHYSICIANS WITH EXPERTISE IN DIVING MEDICINE

List of local Medical Doctors that have training and expertise in diving or undersea medicine:

1. Name: _____
Address: _____
Telephone: _____
2. Name: _____
Address: _____
Telephone: _____
3. Name: _____
Address: _____
Telephone: _____
4. Name: _____
Address: _____
Telephone: _____
5. Name: _____
Address: _____
Telephone: _____

APPENDIX 5 DEFINITION OF TERMS

Air sharing - Sharing of an air supply between divers.

ATA(s) - “Atmospheres Absolute”, Total pressure exerted on an object, by a gas or mixture of gases, at a specific depth or elevation, including normal atmospheric pressure.

Breath-hold Diving - A diving mode in which the diver uses no self-contained or surface-supplied air or oxygen supply.

Buddy Breathing - Sharing of a single air source between divers.

Buddy Diver - Second member of the dive team.

Buddy System - Two comparably equipped SCUBA divers in the water in constant communication.

Buoyant Ascent - An ascent made using some form of positive buoyancy.

Burst Pressure - Pressure at which a pressure containment device would fail structurally.

Certified Diver - A diver who holds a recognized valid certification from an organizational member or internationally recognized certifying agency.

Controlled Ascent - Any one of several kinds of ascents including normal, swimming, and air sharing ascents where the diver(s) maintain control so a pause or stop can be made during the ascent.

Cylinder - A pressure vessel for the storage of gases.

Decompression Chamber - A pressure vessel for human occupancy. Also called a hyperbaric chamber or decompression chamber.

Decompression Sickness - A condition with a variety of symptoms, which may result from gas, and bubbles in the tissues of divers after pressure reduction.

Dive - A descent into the water, an underwater diving activity utilizing compressed gas, an ascent, and return to the surface.

Dive Computer - A microprocessor based device which computes a diver’s theoretical decompression status, in real time, by using pressure (depth) and time as input to a decompression model, or set of decompression tables, programmed into the device.

Dive Location - A surface or vessel from which a diving operation is conducted.

Dive Site - Physical location of a diver during a dive.

APPENDIX 5
DEFINITION OF TERMS (page 2)

Dive Table - A profile or set of profiles of depth-time relationships for ascent rates and breathing mixtures to be followed after a specific depth-time exposure or exposures.

Diver - An individual in the water who uses apparatus, including snorkel, which supplies breathing gas at ambient pressure.

Diver-in-Training - An individual gaining experience and training in additional diving activities under the supervision of a dive team member experienced in those activities.

Diver-Carried Reserve Breathing Gas - A diver-carried independent supply of air or mixed gas (as appropriate) sufficient under standard operating conditions to allow the diver to reach the surface, or another source of breathing gas, or to be reached by another diver.

Diving Mode - A type of diving required specific equipment, procedures, and techniques, for example, snorkel, SCUBA, surface-supplied air, or mixed gas.

Diving Control Board (DCB) - Group of individuals who act as the official representative of the membership organization in matters concerning the scientific diving program (Section 1.24).

Diving Safety Officer (DSO) - Individual responsible for the safe conduct of the scientific diving program of the membership organization (Section 1.20).

EAD - Equivalent Air Depth (see below).

Emergency Ascent - An ascent made under emergency conditions where the diver exceeds the normal ascent rate.

Enriched Air (EAN_x) - A name for a breathing mixture of air and oxygen when the percent of oxygen exceeds 21%. This term is considered synonymous with the term “Nitrox” (Section 7.00).

Equivalent Air Depth (EAD) - Depth at which air will have the same nitrogen partial pressure as the Nitrox mixture being used. This number, expressed in units of feet seawater or saltwater, will always be less than the actual depth for any enriched air mixture.

fN₂ - Fraction of nitrogen in a gas mixture, expressed as either a decimal or percentage, by volume.

fO₂ - Fraction of oxygen in a gas mixture, expressed as either a decimal or percentage, by volume.

FFW – Feet or freshwater, or equivalent static head

APPENDIX 5
DEFINITION OF TERMS (page 3)

FSW - Feet of seawater, or equivalent static head.

Hookah Diving - A type of shallow water surface-supplied diving where there is no voice communication with the surface.

Hyperbaric Chamber - See decompression chamber.

Hyperbaric Conditions - Pressure conditions in excess of normal atmospheric pressure at the dive location.

Lead Diver - Certified scientific diver with experience and training to conduct the diving operation.

Maximum Working Pressure - Maximum pressure to which a pressure vessel may be exposed under standard operating conditions.

Organizational Member - An organization which is a current member of the AAUS, and which has a program, which adheres to the standards of the AAUS as, set forth in the AAUS Standards for Scientific Diving Certification and Operation of Scientific Diving Programs.

Mixed Gas – MG

Mixed-Gas Diving - A diving mode in which the diver is supplied in the water with a breathing gas other than air.

MOD - Maximum Operating Depth, usually determined as the depth at which the pO_2 for a given gas mixture reaches a predetermined maximum.

MSW - Meters of seawater or equivalent static head.

Nitrox - Any gas mixture comprised predominately of nitrogen and oxygen, most frequently containing between 21% and 40% oxygen. Also be referred to as Enriched Air Nitrox, abbreviated EAN.

NOAA Diving Manual: Refers to the *NOAA Diving Manual, Diving for Science and Technology*, 2001 edition. National Oceanic and Atmospheric Administration, Office of Undersea Research, US Department of Commerce.

No-Decompression limits - Depth-time limits of the “no-decompression limits and repetitive dive group designations table for no-decompression air dives” of the U.S. Navy Diving Manual or equivalent limits.

APPENDIX 5
DEFINITION OF TERMS (page 4)

Normal Ascent - An ascent made with an adequate air supply at a rate of 60 feet per minute or less.

Oxygen Clean - All combustible contaminants have been removed.

Oxygen Compatible - A gas delivery system that has components (o-rings, valve seats, diaphragms, etc.) that are compatible with oxygen at a stated pressure and temperature.

Oxygen Service - A gas delivery system that is both oxygen clean and oxygen compatible.

Oxygen Toxicity Unit – OUT

Oxygen Toxicity - Any adverse reaction of the central nervous system (“acute” or “CNS” oxygen toxicity) or lungs (“chronic”, “whole-body”, or “pulmonary” oxygen toxicity) brought on by exposure to an increased (above atmospheric levels) partial pressure of oxygen.

Pressure-Related Injury - An injury resulting from pressure disequilibrium within the body as the result of hyperbaric exposure. Examples include: decompression sickness, pneumothorax, mediastinal emphysema, air embolism, subcutaneous emphysema, or ruptured eardrum.

Pressure Vessel - See cylinder.

pN₂ - Inspired partial pressure of nitrogen, usually expressed in units of atmospheres absolute.

pO₂ - Inspired partial pressure of oxygen, usually expressed in units of atmospheres absolute.

Psi - Unit of pressure, “pounds per square inch.

Psig - Unit of pressure, “pounds per square inch gauge.

Recompression Chamber - see decompression chamber.

Scientific Diving - Scientific diving is defined (29CFR1910.402) as diving performed solely as a necessary part of a scientific, research, or educational activity by employees whose sole purpose for diving is to perform scientific research tasks.

SCUBA Diving - A diving mode independent of surface supply in which the diver uses open circuit self-contained underwater breathing apparatus.

Standby Diver - A diver at the dive location capable of rendering assistance to a diver in the water.

APPENDIX 5
DEFINITION OF TERMS (page 5)

Surface Supplied Diving - A diving mode in which the diver in the water is supplied from the dive location with compressed gas for breathing.

Swimming Ascent - An ascent, which can be done under normal or emergency conditions accomplished by simply swimming to the surface.

Umbilical - Composite hose bundle between a dive location and a diver or bell, or between a diver and a bell, which supplies a diver or bell with breathing gas, communications, power, or heat, as appropriate to the diving mode or conditions, and includes a safety line between the diver and the dive location.

Working Pressure - Normal pressure at which the system is designed to operate.

**APPENDIX 6
AAUS REQUEST FOR DIVING RECIPROCITY FORM
VERIFICATION OF DIVER TRAINING AND EXPERIENCE**

Diver: _____

Date: _____

This letter serves to verify that the above listed person has met the training and pre-requisites as indicated below, and has completed all requirements necessary to be certified as a (*Scientific Diver / Diver in Training*) as established by the LUMCON Diving Safety Manual, and has demonstrated competency in the indicated areas. LUMCON is an AAUS OM and meets or exceeds all AAUS training requirements.

The following is a brief summary of this diver's personnel file regarding dive status at

(Date)

_____ Original diving authorization	
_____ Written scientific diving examination	
_____ Last diving medical examination	Medical examination expiration date _____
_____ Most recent checkout dive	
_____ Scuba regulator/equipment service/test	
_____ CPR training (Agency) _____	CPR Exp. _____
_____ Oxygen administration (Agency) _____	O2 Exp. _____
_____ First aid for diving _____	F.A. Exp. _____
_____ Date of last dive _____ Depth _____	
Number of dives completed within previous 12 months? _____	Depth Certification _____ fsw
Total number of career dives? _____	

Any restrictions? (Y/N) _____ if yes, explain:

Please indicate any pertinent specialty certifications or training:

Emergency Information:

Name: _____ Relationship: _____
 Telephone: _____ (work) _____ (home)
 Address: _____

This is to verify that the above individual is currently a certified scientific diver at _____

Diving Safety Officer:

(Signature) _____ (Date) _____

(Print)

_____ Total number of career dives?

Any restrictions? (Y/N) _____ if yes, explain _____

APPENDIX 7 DIVING EMERGENCY MANAGEMENT PROCEDURES

Introduction

A diving accident victim could be any person who has been breathing air underwater regardless of depth. It is essential that emergency procedures are pre-planned and that medical treatment is initiated as soon as possible. It is the responsibility of each AAUS organizational member to develop procedures for diving emergencies including evacuation and medical treatment for each dive location.

General Procedures

Depending on and according to the nature of the diving accident:

1. Make appropriate contact with victim or rescue as required.
2. Establish (A)irway, (B)reathing, (C)irculation as required.
3. Stabilize the victim
3. Administer 100% oxygen, if appropriate (in cases of Decompression Illness, or Near Drowning).
4. Call local Emergency Medical System (EMS) for transport to nearest medical treatment facility. Explain the circumstances of the dive incident to the evacuation teams, medics and physicians.
Do not assume that they understand why 100% oxygen may be required for the diving accident victim or that recompression treatment may be necessary.
5. Call appropriate Diving Accident Coordinator for contact with diving physician and decompression chamber. etc.
6. Notify DSO or designee according to the LUMCON Emergency Action Plan.
7. Complete and submit Incident Report Form (www.aaus.org) to the DCB of the organization and the AAUS (Section 2.70 Required Incident Reporting).

List of Emergency Contact Numbers Appropriate For Dive Location

Available Procedures

- Emergency care
- Recompression
- Evacuation
-

Emergency Plan Content

- Name, telephone number, and relationship of person to be contacted for each diver in the event of an emergency.
- Nearest operational decompression chamber.
- Nearest accessible hospital.
- Available means of transport

APPENDIX 8 DIVE COMPUTER GUIDELINES

1. Only those makes and models of dive computers specifically approved by the Diving Control Board may be used.
2. Any diver desiring the approval to use a dive computer as a means of determining decompression status must apply to the Diving Control Board, complete an appropriate practical training session and pass a written examination.
3. Each diver relying on a dive computer to plan dives and indicate or determine decompression status must have his/her own unit.
4. On any given dive, both divers in the buddy pair must follow the most conservative dive computer.
5. If the dive computer fails at any time during the dive, the dive must be terminated and appropriate surfacing procedures should be initiated immediately.
6. A diver should not dive for 18 hours before activating a dive computer to use it to control their diving.
7. Once the dive computer is in use, it must not be switched off until it indicates complete out gassing has occurred or 18 hours have elapsed, whichever comes-first.
8. When using a dive computer, non emergency ascents are to be at a rate specified for the make and model of dive computer being used.
10. Whenever practical, divers using a dive computer should make a stop between 10 and 30 feet for 5 minutes, especially for dives below 60 fsw.
11. Multiple deep dives require special consideration.

APPENDIX 9

AAUS STATISTICS COLLECTION CRITERIA AND DEFINITIONS

COLLECTION CRITERIA:

The "Dive Time in Minutes", "The Number of Dives Logged", and the "Number of Divers Logging Dives" will be collected for the following categories.

- Dive Classification
- Breathing Gas
- Diving Mode
- Decompression Planning and Calculation Method
- Depth Ranges
- Specialized Environments
- Incident Types

Dive Time in Minutes is defined as the surface to surface time including any safety or required decompression stops.

A Dive is defined as a descent into water, an underwater diving activity utilizing compressed gas, an ascent/return to the surface, and a surface interval of greater than 10 minutes.

Dives will not be differentiated as openwater or confined water dives. But openwater and confined water dives will be logged and submitted for AAUS statistics classified as either scientific or training/proficiency.

A "Diver Logging a Dive" is defined as a person who is diving under the auspices of your scientific diving organization. Dives logged by divers from another AAUS Organization will be reported with the divers home organization. Only a diver who has actually logged a dive during the reporting period is counted under this category.

Incident(s) occurring during the collection cycle. Only incidents occurring during, or resulting from, a dive where the diver is breathing a compressed gas will be submitted to AAUS.

DEFINITIONS:

Dive Classification:

- Scientific Dives: Dives that meet the scientific diving exemption as defined in 29 CFR 1910.402. Diving tasks traditionally associated with a specific scientific discipline are considered a scientific dive. Construction and trouble-shooting tasks traditionally associated with commercial diving are not considered a scientific dive.
- Training and Proficiency Dives: Dives performed as part of a scientific diver training program, or dives performed in maintenance of a scientific diving certification/authorization.

Breathing Gas:

- Air: Dives where the bottom gas used for the dive is air.

- Nitrox: Dives where the bottom gas used for the dive is a combination of nitrogen and oxygen other than air.
- Mixed Gas: Dives where the bottom gas used for the dive is a combination of oxygen, nitrogen, and helium (or other "exotic" gas), or any other breathing gas combination not classified as air or nitrox.

Diving Mode:

- Open Circuit Scuba: Dives where the breathing gas is inhaled from a self contained underwater breathing apparatus and all of the exhaled gas leaves the breathing loop.
- Surface Supplied: Dives where the breathing gas is supplied from the surface by means of a pressurized umbilical hose. The umbilical generally consists of a gas supply hose, strength member, pneumofathometer hose, and communication line. The umbilical supplies a helmet or full-face mask. The diver may rely on the tender at the surface to keep up with the divers' depth, time and diving profile.
- Hookah: While similar to Surface Supplied in that the breathing gas is supplied from the surface by means of a pressurized hose, the supply hose does not require a strength member, pneumofathometer hose, or communication line. Hookah equipment may be as simple as a long hose attached to a standard scuba cylinder supplying a standard scuba second stage. The diver is responsible for the monitoring his/her own depth, time, and diving profile.
- Rebreathers: Dives where the breathing gas is repeatedly recycled in the breathing loop. The breathing loop may be fully closed or semi-closed. Note: A rebreather dive ending in an open circuit bailout is still logged as a rebreather dive.

Decompression Planning and Calculation Method:

- Dive Tables
- Dive Computer
- PC Based Decompression Software

Depth Ranges:

Depth ranges for sorting logged dives are 0-30, 31-60, 61-100, 101-130, 131-150, 151-190, and 191->. Depths are in feet seawater. A dive is logged to the maximum depth reached during the dive. Note: Only "The Number of Dives Logged" and "The Number of Divers Logging Dives" will be collected for this category.

Specialized Environments:

- Required Decompression: Any dive where the diver exceeds the no-decompression limit of the decompression planning method being employed.
- Overhead Environments: Any dive where the diver does not have direct access to the surface due to a physical obstruction.
- Blue Water Diving: Openwater diving where the bottom is generally greater than 200 feet deep and requiring the use of multiple-tethered diving techniques.

- Ice and Polar Diving: Any dive conducted under ice or in polar conditions. Note: An Ice Dive would also be classified as an Overhead Environment dive.
- Saturation Diving: Excursion dives conducted as part of a saturation mission are to be logged by "classification", "mode", "gas", etc. The "surface" for these excursions is defined as leaving and surfacing within the Habitat. Time spent within the Habitat or chamber shall not be logged by AAUS.
- Aquarium: An aquarium is a shallow, confined body of water, which is operated by or under the control of an institution and is used for the purposes of specimen exhibit, education, husbandry, or research. (Not a swimming pool)

Incident Types:

- Hyperbaric: Decompression Sickness, AGE, or other barotrauma requiring recompression therapy.
- Barotrauma: Barotrauma requiring medical attention from a physician or medical facility, but not requiring recompression therapy.
- Injury: Any non-barotrauma injury occurring during a dive that requires medical attention from a physician or medical facility.
- Illness: Any illness requiring medical attention that can be attributed to diving.
- Near Drowning/ Hypoxia: An incident where a person asphyxiates to the minimum point of unconsciousness during a dive involving a compressed gas. But the person recovers.
- Hyperoxic/Oxygen Toxicity: An incident that can be attributed to the diver being exposed to too high a partial pressure of oxygen.
- Hypercapnea: An incident that can be attributed to the diver being exposed to an excess of carbon dioxide.
- Fatality: Any death accruing during a dive or resulting from the diving exposure.
- Other: An incident that does not fit one of the listed incident types

Incident Classification Rating Scale:

- Minor: Injuries that the OM considers being minor in nature. Examples of this classification of incident would include, but not be limited to:
 - Mask squeeze that produced discoloration of the eyes.
 - Lacerations requiring medical attention but not involving moderate or severe bleeding.
 - Other injuries that would not be expected to produce long term adverse effects on the diver's health or diving status.
- Moderate: Injuries that the OM considers being moderate in nature. Examples of this classification would include, but not be limited to:
 - DCS symptoms that resolved with the administration of oxygen, hyperbaric treatment given as a precaution.
 - DCS symptoms resolved with the first hyperbaric treatment.
 - Broken bones.
 - Torn ligaments or cartilage.
 - Concussion.
 - Ear barotrauma requiring surgical repair.

- Serious: Injuries that the OM considers being serious in nature. Examples of this classification would include, but not be limited to:
 - Arterial Gas Embolism.
 - DCS symptoms requiring multiple hyperbaric treatment.
 - Near drowning.
 - Oxygen Toxicity.
 - Hypercapnea.
 - Spinal injuries.
 - Heart attack.
 - Fatality.



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell; (985) 688-8562
email: lp ride@lumcon.edu,
www.lumcon.edu/diveprogram



Appendices

A through P

LUMCON SPECIFIC



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell; (985) 688-8562
email: lpriide@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX A DEFINITIONS

**Please use these definitions when filling out dive logs and accident reports
(modified from www.aaus.org)**

Dive: A descent into water, an underwater diving activity utilizing compressed gas, an ascent/return to the surface, and a surface interval of greater than ten minutes. (minimum depth = 15 fsw). Dives will not be differentiated as open water or confined water dives. But open water and confined water dives will be logged and submitted for AAUS statistics classified as either scientific or training/proficiency.

Dive Time in Minutes: the surface to surface time including any safety or required decompression stops.

“Diver Logging a Dive”: A person who is diving under the auspices of your scientific diving organization. Dives logged by divers from another AAUS Organization will be reported with the diver’s home organization. Only a diver who has actually logged a dive during the reporting period is counted under this category.

Incident: injury or accident occurring during, or resulting from, a dive where the diver is breathing a compressed gas will be submitted to AAUS.

Dive Classification

Scientific Dives: Dives that meet the scientific diving exemption as defined in 29 CFR 1910.402. Diving tasks traditionally associated with a specific scientific discipline are considered a scientific dive. Construction and trouble-shooting tasks traditionally associated with commercial diving are not considered a scientific dive.

Training and Proficiency Dives: Dives performed as part of a scientific diver training program, or dives performed in maintenance of a scientific diving certification/authorization.

Depth Ranges

Depth ranges for sorting logged dives are 0-30, 31-60, 61-100, 101-130, 131-150, 151-190, and 191->. Depths are in feet seawater. A dive is logged to the maximum depth reached during the dive.

Breathing Gas

Air: Dives where the bottom gas used for the dive is air.

Nitrox: Dives where the bottom gas used for the dive is a combination of nitrogen and oxygen other than air.

Mixed Gas: Dives where the bottom gas used for the dive is a combination of oxygen, nitrogen, and helium (or other gas), or any other breathing gas combination not classified as air or Nitrox.



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell; (985) 688-8562
email: lpriede@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX A DEFINITIONS (Page 2)

Diving Mode

Open Circuit SCUBA: Dives where the breathing gas is inhaled from a self contained underwater breathing apparatus and all of the exhaled gas leaves the breathing loop.

Surface Supplied: Dives where the breathing gas is supplied from the surface by means of a pressurized umbilical hose. The umbilical generally consists of a gas supply hose, strength member, pneumofathometer hose, and communication line. The umbilical supplies a helmet or full-face mask. The diver may rely on the tender at the surface to keep up with the divers' depth, time and diving profile.

Hookah: While similar to Surface Supplied in that the breathing gas is supplied from the surface by means of a pressurized hose, the supply hose does not require a strength member, pneumofathometer hose, or communication line. Hookah equipment may be as simple as a long hose attached to a standard SCUBA cylinder supplying a standard SCUBA second stage. The diver is responsible for the monitoring his/her own depth, time, and diving profile.

Rebreathers: Dives where the breathing gas is repeatedly recycled in the breathing loop. The breathing loop may be fully closed or semi-closed. Note: A rebreather dive ending in an open circuit bailout is still logged as a rebreather dive.

Decompression Planning and Calculation Method

Dive Tables

Dive Computer

PC Based Decompression Software

Specialized Environments

Required Decompression: Any dive where the diver exceeds the no-decompression limit of the decompression planning method being employed.

Overhead Environments: Any dive where the diver does not have direct access to the surface due to a physical obstruction.

Blue Water Diving: Open water diving where the bottom is generally > 200 feet deep and requiring the use of multiple-tethered diving techniques.

Ice and Polar Diving: Any dive conducted under ice or in polar conditions. Note: An Ice Dive would also be classified as an Overhead Environment dive.



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell: (985) 688-8562
email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX A DEFINITIONS (Page 3)

Saturation Diving: Excursion dives conducted as part of a saturation mission are to be logged by classification mode, gas, etc. The surface for these excursions is defined as leaving and surfacing within the Habitat. Time spent within the Habitat or chamber shall not be logged by AAUS.

Aquarium: A specialized environment designed for the housing, and/or exhibition of fish, etc. Not a swimming pool.

Incident Types

Hyperbaric: Decompression Sickness, AGE, or other barotrauma requiring recompression therapy.

Barotrauma: Barotrauma requiring medical attention from a physician or medical facility, but not requiring recompression therapy.

Injury: Any non-barotrauma injury accruing during a dive that requires medical attention from a physician or medical facility.

Illness: Any illness requiring medical attention that can be attributed to diving.

Near Drowning/Hypoxia: An incident where a person asphyxiates to the minimum point of unconsciousness during a dive involving a compressed gas. But the person recovers.

Hyperoxic/Oxygen Toxicity: An incident that can be attributed to the diver being exposed to too high a partial pressure of oxygen.

Hypercapnea: An incident that can be attributed to the diver being exposed to an excess of carbon dioxide.

Fatality: Any death accruing during a dive or resulting from the diving exposure.

Other: An incident that does not fit one of the listed incident types

Incident Classification Rating Scale

Minor: Injuries that LUMCON and AAUS consider being minor in nature. Examples of this classification of incident would include, but not be limited to: mask squeeze that produced discoloration of the eyes; lacerations requiring medical attention but not involving moderate or severe bleeding; other injuries that would not be expected to produce long term adverse effects on the diver's health or diving status.

Moderate: Injuries that LUMCON and AAUS consider being moderate in nature. Examples of this classification would include, but not be limited to: Decompression Sickness (DCS) symptoms that resolved with the administration of oxygen with hyperbaric treatment given as a precaution; DCS symptoms resolved with the first hyperbaric treatment; broken bones; torn ligaments or cartilage; concussion; ear barotrauma requiring surgical repair.

Serious: Injuries that LUMCON and AAUS consider being serious in nature. Examples of this classification would include, but not be limited to: Arterial Gas Embolism (AGE); Decompression Sickness (DCS) symptoms requiring multiple hyperbaric treatment; near drowning; oxygen toxicity; hypercapnea; spinal injuries; heart attack; fatality.



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX B
LUMCON SCIENTIFIC DIVER APPLICATION
Please fill out completely and attach a current photograph

PERSONAL INFORMATION

Name (Last,First,MI) _____

Birth Date _____ Social Security # _____

Home Address _____ Home Phone # _____

Work Address _____ Work Phone # _____

Mobile Phone # _____ Email Address _____ Fax # _____

EMERGENCY CONTACT INFORMATION

Name (Last,First,MI) _____

Address _____

Home Phone # _____ Mobile/Work Phone # _____

Relationship to applicant _____

SCUBA DIVING RESUME

Level	Agency	Date	Location	Instructor	(#)
Open Water	_____	_____	_____	_____	_____
Adv. Open Water	_____	_____	_____	_____	_____
Rescue Diver	_____	_____	_____	_____	_____
Dive Master	_____	_____	_____	_____	_____
EAN/Nitrox	_____	_____	_____	_____	_____
Assistant Instructor	_____	_____	_____	_____	_____
Instructor	_____	_____	_____	_____	_____
Other #1	_____	_____	_____	_____	_____
Other #2	_____	_____	_____	_____	_____

DIVING ACTIVITY

Number of years _____ Total hours _____ Greatest depth _____

Total dives _____ Total dives (last 12 months) _____

Total dives (last 6 months) _____ Date of last dive _____

Cumulative number of dives per depth:

0-30 _____ 31-60 _____ 61-100 _____ 101-130 _____ >130 _____



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell: (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX B
LUMCON SCIENTIFIC DIVER APPLICATION (Page 2)

Experience: Mark with an "X" for each area in which you have experience

- | | | | |
|-------------------------------------|--|---|---|
| <input type="checkbox"/> Ocean | <input type="checkbox"/> Freshwater | <input type="checkbox"/> Low Visibility | <input type="checkbox"/> Boat |
| <input type="checkbox"/> Kelp | <input type="checkbox"/> Search & Recovery | <input type="checkbox"/> Shore | <input type="checkbox"/> Photography |
| <input type="checkbox"/> Deep | <input type="checkbox"/> Decompression | <input type="checkbox"/> Surf | <input type="checkbox"/> Navigation |
| <input type="checkbox"/> Night | <input type="checkbox"/> Cold Water | <input type="checkbox"/> Currents | <input type="checkbox"/> Dive Computer |
| <input type="checkbox"/> Ice | <input type="checkbox"/> Wreck | <input type="checkbox"/> Surface Supplied | <input type="checkbox"/> Mixed Gas/Nitrox |
| <input type="checkbox"/> Saturation | <input type="checkbox"/> Blue water | <input type="checkbox"/> Cave/Cavern | <input type="checkbox"/> Dry Suit |

Additional Experience:

SAFETY TRAINING

Type	Agency	Date	Location
------	--------	------	----------

CPR _____

First Aid _____

Emergency O₂ _____

AED _____

Other _____

Do you have dive insurance (Divers Alert Network or similar) (circle one) _____ Yes _____ No _____ ID #

DIVE EQUIPMENT

Item	Brand	Serial #	Purchase Date	Last Inspection	LUMCON/Personal
------	-------	----------	---------------	-----------------	-----------------

Regulator _____

Alternate Air _____

Pressure Gauge _____

Depth Gauge _____

Dive Computer _____

Cylinder _____

BCD _____

Other #1 _____

Other #2 _____



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX B
LUMCON SCIENTIFIC DIVER APPLICATION (Page 3)

MEDICAL

Date of last diving medical evaluation _____

PRIOR CERTIFICATION

Have you previously been certified as a Scientific Diver by an AAUS Member? _____ Yes _____ No

Organization and address _____

Diving Safety Officer _____

Depth Certification _____

LUMCON AFFILIATION

- _____ LUMCON Faculty
- _____ LUMCON Employee (Postdoc, Technician, etc) (Supervisor _____)
- _____ LUMCON Student/Intern (Advisor _____)
- _____ LUMCON Volunteer Diver (LUMCON contact & phone # _____)
- _____ Consortium Member Faculty
 (Institution & Dept. _____, Dept. Head & Phone # _____)
- _____ Consortium Member Employee (Postdoc, Technician, etc)
 (Institution & Dept. _____, Supervisor & Phone # _____)
- _____ Consortium Member Student
 (Institution & Dept. _____, Advisor & Phone # _____)



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX C
LUMCON SCIENTIFIC DIVER WAIVER OF LIABILITY

I AM AWARE THAT SCUBA DIVING AND UNDERWATER RESEARCH ARE HAZARDOUS ACTIVITIES, AND I AM VOLUNTARILY PARTICIPATING IN THESE ACTIVITIES WITH KNOWLEDGE OF THE DANGER INVOLVED AND HEREBY AGREE TO ACCEPT ANY AND ALL RISKS OF INJURY OR DEATH.

Initial

I FURTHER UNDERSTAND THAT BY SIGNING THIS DOCUMENT, I AM RELEASING ANY CLAIMS WHICH I MAY HAVE AGAINST MY INSTRUCTOR OR AGAINST LUMCON AS THE SPONSOR/PROMOTER OF THIS DIVING AND/OR UNDERWATER RESEARCH OPERATION, AND SUCH PERSONS ACTING AS LUMCON'S OFFICERS, EMPLOYEES, OR AGENTS FROM ANY LIABILITY FOR PERSONAL INJURY, PROPERTY DAMAGE AND/OR WRONGFUL DEATH ARISING FROM MY PARTICIPATION IN THE DIVING/UNDERWATER RESEARCH ACTIVITIES I WISH TO ENGAGE IN BETWEEN THE DATES OF

_____ AND _____, INCLUSIVE.

Initial

I HEREBY PERSONALLY ASSUME ALL RISKS IN CONNECTION WITH SAID DIVING AND UNDERWATER RESEARCH FOR ANY HARM, INJURY OR DAMAGE WHICH MAY BEFALL ME AS A RESULT OF MY PARTICIPATION IN THIS ACTIVITY WHETHER FORESEEN OR UNFORESEEN, I STILL WISH TO PROCEED WITH THE DIVING/UNDERWATER RESEARCH ACTIVITY IN SPITE OF THE POSSIBLE ABSENCE OF A RECOMPRESSION CHAMBER IN THE PROXIMITY OF THE DIVE SITE.

Initial

I HAVE READ THIS FORM AND FULLY UNDERSTAND THAT DIVING/UNDERWATER RESEARCH ARE DANGEROUS ACTIVITIES AND THAT BY SIGNING THIS FORM, I AM GIVING UP LEGAL RIGHTS THAT I HAVE.

Initial

Participant Name Participant Signature Date

Witness Name Witness Signature Date



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpide@lumcon.edu,
www.lumcon.edu/diveprogram



**APPENDIX E
 INDEMNIFICATION AND STATEMENT OF RESPONSIBILITY OF MEMBER
 UNIVERSITY**

In consideration of the Louisiana Universities Marine Consortium (LUMCON) providing the scientific diver named below with the opportunity to engage in scientific diving activities through training and administration of written exams, verification of SCUBA training and skills, verification of emergency safety training, and verification of swimming skills,

The _____,
 (parent organization)

Department of _____,

(The Organization) agrees to indemnify and hold harmless LUMCON, its officers, employees, and agents, from all claims, demands and actions, including but not limited to costs, expenses and legal fees incurred in defending any such claims, demands, or actions, for damage to personal property, personal injury or death arising by reason of the negligent or other acts or omissions of the Organization or the Organization's scientific diver.

The Organization also agrees to assume full responsibility and liability for compliance with the requirements set forth above.

 Scientific Diver Date

 Department Chairperson Date
 or Designated University Representative

IMPORTANT: The non-employee scientific diver and department chair (or designated university representative) must complete, sign and submit this form as indicated above PRIOR to conducting any diving activity.

Return to:
 LUMCON SCIENTIFIC DIVING SAFETY OFFICER:
 Lora Pride
 LUMCON
 8124 Highway 56
 Chauvin, LA 70344
 Ph: (985)851-2834; Fax: (985) 851-2874; Cell; (985) 688-8562 lpide@lumcon.edu



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX H
LUMCON ACKNOWLEDGEMENT OF RESPONSIBILITIES AND CERTIFICATION OF
DIVING ACCIDENT INSURANCE

I, _____, have been provided with a copy of the LUMCON Scientific Diving Manual. I have read these standards and understand their provisions. Furthermore, I accept and agree to the following:

_____ I will maintain good standing with the Diving Safety Program as set forth in this manual.

_____ I will provide the Diving Safety Officer with a written dive plan at least 72 hours in advance of any proposed dive activity.

_____ I will maintain complete dive records and provide same to the DSO within 7 days of diving activity. I understand that web-based tools are available and their use is strongly recommended.

_____ I will maintain up-to-date diver profile and records of all training. I understand that web-based tools are available and their use is strongly recommended.

_____ I will maintain current medical insurance covering recompression therapy and provide proof of insurance upon renewal.

Name

 Insurance Company

 Policy Number

 Expiration Date

I certify this insurance policy covers Hyperbaric Oxygen Therapy in a recompression chamber for SCUBA diving accidents.

 Signature

 Date



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX I SCIENTIFIC DIVER TRAINING VERIFICATION CHECKSHEET

Name: _____

Must be completed to achieve Diver-in-Training certification:

Date	DSO Initial	Diver Initial	Activity
			Certified in basic SCUBA + 5 open water dives
			Completed application and diver resume
			Diving Medical Exam within 60 days of application
			Inspection of all dive gear
			Current CPR training
			Current First Aid training
			Current Emergency Oxygen Delivery training
			Swim 400 yards unassisted in less than 12 minutes
			Tread water unassisted for 10 minutes
			Swim underwater unassisted 25 yards without surfacing
			Tow another person of equal size 25 yards
			Written Exam
			Dive checkout
			Signed Liability Waiver

Additional items to be completed to achieve Scientific Diver certification:

Date	DSO Initial	Diver Initial	Activity
			Maintain current safety training (CPR/First-Aid/O ₂)
			Maintain current medical examination
			Maintain an up to date dive log book
			Maintain annual inspection of all dive gear
			100 Hours of theoretical and practical training (safety, advanced diving methods, scientific)
			12 Supervised open water dives

Copy to:

- Diver
- DSO
- Diver file



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX J
LUMCON DIVE PLAN FORM

An approved dive plan is required to be filed with the Diving Safety Officer prior to any diving activity.

Plan Submitted By (Name) _____ Today's Date _____

Projected Date and Time of Departure _____

Projected Date and Time of Return _____

Location of Dive (incl. GPS Coordinates) _____

Vessel _____

Project Principal Investigator	Institution	Phone #
_____	_____	_____

Lead Diver (if different than PI)	Institution	Phone
_____	_____	_____

Diver's Names	Certification Level (Diver-in-Training/Scientific Diver)	Certification Depth (30, 60, 100, 130 fsw)

Planned # of dives _____

	Planned depth	Planned bottom time	Proposed activity
Dive #1			
Dive #2			
Dive #3			
Dive #4			
Dive #5			

Special considerations (overhead environment, currents, etc.):

All dive activities require an approved accident procedure plan be on hand at the dive site, and that all divers are aware of the plan. Such a plan should include the location and phone number of nearest EMS services and nearest recompression chamber.




Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpriide@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX K
LUMCON DIVE LOG FORM

*Dive log sheets must be turned into the Diving Safety Officer within seven days of each dive expedition. Dive logs should be filled out online at www.lumcon.edu/diveprogram
 Written dive log sheets are available from the Diving Safety Officer.
 A separate accident report is required for any dive accidents, injuries, or equipment failures.*

Diver Name and Affiliation _____
 Diver Cert. Level _____ Diver Cert. Depth _____
 Buddy Name and Affiliation _____
 Buddy Cert. Level _____ Buddy Cert. Depth _____
 Diver Signature _____ Buddy Signature _____
 Project PI _____ Divemaster/Lead Diver _____
 Dive Location _____ Dive Date _____
 Dive Purpose _____ Research _____ Training _____
 Equipment _____ SCUBA _____ Surface Supplied _____ Rebreather _____
 Gas Mix _____ Air _____ Nitrox _____ Trimix _____
 Specify mix _____ Nitrox _____ Trimix _____
 Planning _____ Computer _____ Tables _____ Software _____
 Specify _____ Computer _____ Tables _____ Software _____

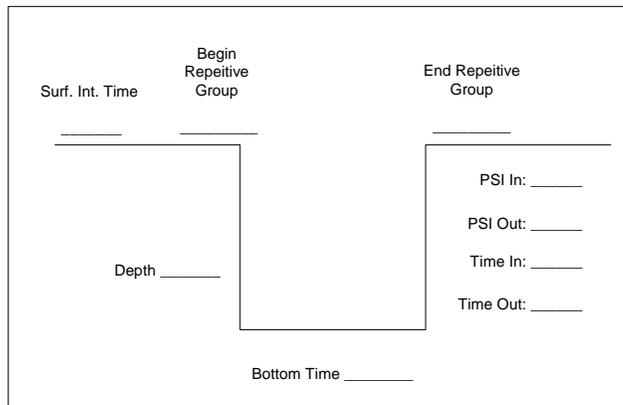

Comments:



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpide@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX L
LUMCON DIVING EMERGENCY PLAN FORM

An approved emergency plan is required to be at the dive site.

Project PI (Name, Institution, Phone) _____

Lead Diver (Name, Institution, Phone) _____

Institutional Emergency Contact (Safety Officer, Dept. Head, etc.) _____

Backup Inst. Emergency Contact (Safety Officer, Dept. Head, etc.) _____

Dive Site Name and Location (incl. GPS Coordinates) _____

Nearest Phone (#, location, and distance from site) _____

Nearest port or other EMS access point (Name, Address, Phone, and Directions for EMS)

Nearest Medical Facility (Name, Address, Phone) _____

Nearest EMS Phone Number (if not 911) _____

Nearest Recompression Chamber (Name, Address, Phone) _____

Notes:

All dive activities require an approved accident procedure plan be on hand at the dive site, and that all divers are aware of the plan. Such a plan should include the location and phone number of nearest EMS services and nearest recompression chamber.



Diving Safety Office
 Louisiana Universities Marine Consortium
 8124 Hwy. 56, Chauvin Louisiana 70344;
 Voice: (985) 851-2834, Fax: (985) 851-2874
 Cell; (985) 688-8562
 email: lpride@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX M
LUMCON INCIDENT REPORT FORM
See Definitions (Appendix A) before filling out form

DIVER INFORMATION

Name _____ Age _____ Sex _____
 Relevant medical history _____
 Incident type (barotrauma, hyperbaric, hypoxia, etc) _____
 Incident severity (minor, moderate, severe) _____
 Will a Workman's Compensation claim be filed? _____

DIVING INFORMATION

Date of incident _____
 Purpose of dive _____ research _____ training
 Diving mode _____ SCUBA _____ hookah _____ rebreather
 Gas _____ air _____ Nitrox _____ mixed gas
 Planning _____ Tables _____ Computer _____ Software _____ Depth _____ Bottom time
 Specialized environment _____ overhead _____ aquarium _____ decompression _____ other
 Describe _____
 Site access _____ shore _____ vessel _____ Name of vessel _____
 Position (GPS, Loran, or Dive Site) _____
 Repetitive dive _____ Yes _____ No
 _____ Surface interval _____ Previous dive depth _____ Previous bottom time
 How long after dive did symptoms appear? _____
 Does buddy have symptoms _____ Yes _____ No



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell; (985) 688-8562
email: lpide@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX M
LUMCON INCIDENT REPORT FORM (Page 2)

If you chose "Other" as the "Incident Type", please describe briefly:

Describe the circumstances surrounding this incident:

Describe treatment provided and results:

Recommendation to avoid repetition of incident:



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell; (985) 688-8562
email: lpide@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX O
VERIFICATION OF DEPTH CERTIFICATION

Diver (print)

(Signature)

Certification to **30 Foot Depth** - Initial permit level, approved upon the successful completion of training for entry level Diver-in-Training.

DSO, or designee

Date

Certification to **60 Foot Depth** - A diver holding a 30 foot certificate may be certified to a depth of 60 feet after successfully completing, under supervision, 12 logged training dives to depths between 31 and 60 feet, for a minimum total time of 4 hours.

DSO, or designee

Date

Certification to **100 Foot Depth** - A diver holding a 60 foot certificate may be certified to a depth of 100 feet after successfully completing, 4 dives to depths between 61 and 100 feet. The diver shall also demonstrate proficiency in the use of the appropriate Dive Tables.

DSO, or designee

Date

Certification to **130 Foot Depth** - A diver holding a 100 foot certificate may be certified to a depth of 130 feet after successfully completing, 4 dives to depths between 100 and 130 feet. The diver shall also demonstrate proficiency in the use of the appropriate Dive Tables.

DSO, or designee

Date

Certification to **150 Foot Depth** - A diver holding a 130 foot certificate may be certified to a depth of 150 feet after successfully completing, 4 dives to depths between 130 and 150 feet. The diver must also demonstrate knowledge of the special problems of deep diving, and of special safety requirements.

DSO, or designee

Date

Certification to **190 Foot Depth** - A diver holding a 150 foot certificate may be certified to a depth of 190 feet after successfully completing, 4 dives to depths between 150 and 190 feet. The diver must also demonstrate knowledge of the special problems of deep diving, and of special safety requirements.

DSO, or designee

Date



Diving Safety Office
Louisiana Universities Marine Consortium
8124 Hwy. 56, Chauvin Louisiana 70344;
Voice: (985) 851-2834, Fax: (985) 851-2874
Cell; (985) 688-8562
email: lpide@lumcon.edu,
www.lumcon.edu/diveprogram



APPENDIX P
OTHER AAUS ORGANIZATIONS IN THE GULF OF MEXICO REGION

Applied Research Laboratories

Atkins

Broward County, Florida Natural Resources Planning and Management Division

Coastal & Marine Ecology Consultants, Inc.

Coastal Planning and Engineering, Inc.

Dauphin Island Sea Lab

Delta Seven Inc.

Dial Cordy & Associates, Inc.

Florida Atlantic University

Florida Aquarium

Florida Institute of Technology

Florida International University

Florida Keys Community College

Florida State University

Florida State University Panama City

FWC/Fish and Wildlife research Institute

Geo-Marine, Inc. Scientific Diving Program

LUMCON

Moody Gardens

Nova Southeastern University Oceanographic Center

R. Christopher Goodwin and Associates

Southeast Archaeological Research

SCUBAnauts International, Inc.

Teen Research Underwater Explorers

Tetra Tech

Texas A&M Galveston

Texas Parks and Wildlife Department

Texas State Aquarium

University of Florida

University of Miami/RSMAS

University of Mississippi

University of South Florida

University of Texas at Austin